



Label and Ribbon Guide

Quick access to all the materials you need for
BradyPrinter S3100, BBP®31, BBP®33, BBP®35 and
BBP®37 Printers



Innovative B30/B33 materials lead the way in labelling with:



Ease of use

- Removes guesswork and prevents incorrect installation
- Changeovers in under 20 seconds save you time
- No complicated threading or wrapping around printheads or spindles



Print smart technology

- Printer reads smart chip on loaded label rolls and ribbons
- Automatically populates label size, label colour and pre-printed headers
- No need to manually enter dimensions or scroll through endless screens to find your size
- Smart chip sets the appropriate print settings for optimal print quality



Labels that last

- In-house design and rigorous testing mean reliable and durable labels
- Nothing leaves our doors without meeting our high standards
- Designed for harsh conditions and a variety of surfaces, some labels last up to 10 years outdoors.



Application Versatility

- Hundreds of parts and dozens of label materials offer a wide range of options
- Each label is designed with your application and environment in mind for optimal performance



Reliable printers for every application

Brady's B30 and B33 label and ribbon materials are made for use in many printers. Learn more about each printer below, and visit the website for additional information.



BradyID.com.au/S3100

BradyPrinter S3100 and BBP®31 Label Printers

Walk up, create and print

For the easiest sign and label printer available, try the BradyPrinter S3100. Ideal for multi-user areas in your facility, anyone can simply walk up, create labels right on the spot and print.

- Standalone printer with walk-up-and-print ease of use
- Intuitive and quick label creation
- Entry-level, mono-colour printing (1 print colour on a label)
- Hundreds of application options



BradyID.com.au/BBP33

BBP®33 Label Printer

Do-it-all facility identification

Whether you need hundreds of wire and cable markers, small but durable circuit board labels, or a range of safety signs and facility identification labels, this printer does it all.

- Application versatility for safety, facility, wire and product identification
- Widest variety of high-performance labels
- PC-connect only



BradyID.com.au/BBP37

BBP®35 and BBP®37 Multi-Colour Sign and Label Printers

Colour your way to an improved workplace

Brady's BBP®35 and BBP®37 sign and label printers give you the power to make signs and labels in the colours and shapes you need to make an impact.

- Multi-colour printing for wider label versatility and impactful visuals
- Shape and letter-cutting capabilities (with the BBP37 printer only)
- Fastest, 127mm/sec print speed



Easily find the materials you need

This easy-to-use material guide is designed to help you find the materials for your B30 series printer that best suit applications throughout your facility. Whether you need tags, GHS labels or washdown resistant labels, you'll find a material to meet your needs.



Indoor/Outdoor Vinyl (B-595)

- For general facility and safety identification: Our best industrial vinyl yet!
- Durable, low-shrink vinyl with our most aggressive adhesive
- Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces)
- Adheres to “difficult” low-surface energy items (PVC piping, blow-molded equipment cases, ABS plastics, recycled plastics)

Service temp: -40°C to 82°C
 Application temp: -40 °C to 82°C
 Average outdoor durability: 8–10 years
 Agency approvals: **RoHS**




Figure 3



Diagram	For BBP37 XY-Cutter	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Roll Length B (m)	Labels Per Roll	Rec. Ribbon
Fig. 3		142031	B30C-500-595-WT	B-595	White	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142030	B30C-1125-595-WT	B-595	White	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142029	B30C-2250-595-WT	B-595	White	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142028	B30C-3000-595-WT	B-595	White	76.2	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	142027	B30C-4000-595-WT	B-595	White	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142036	B30C-500-595-YL	B-595	Yellow	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142035	B30C-1125-595-YL	B-595	Yellow	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142034	B30C-2250-595-YL	B-595	Yellow	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142033	B30C-3000-595-YL	B-595	Yellow	76.2	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	142032	B30C-4000-595-YL	B-595	Yellow	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142026	B30C-500-595-RD	B-595	Red	12.7	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		142025	B30C-1125-595-RD	B-595	Red	28.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		142024	B30C-2250-595-RD	B-595	Red	57.5	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3	✂	142023	B30C-4000-595-RD	B-595	Red	101.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		141994	B30C-500-595-BL	B-595	Blue	12.7	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		141993	B30C-1125-595-BL	B-595	Blue	28.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		141992	B30C-2250-595-BL	B-595	Blue	57.5	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3	✂	141991	B30C-4000-595-BL	B-595	Blue	101.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		142010	B30C-500-595-GN	B-595	Green	12.7	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		142009	B30C-1125-595-GN	B-595	Green	28.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		142008	B30C-2250-595-GN	B-595	Green	57.5	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3	✂	142007	B30C-4000-595-GN	B-595	Green	101.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		142018	B30C-500-595-OR	B-595	Orange	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142017	B30C-1125-595-OR	B-595	Orange	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142016	B30C-2250-595-OR	B-595	Orange	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	142015	B30C-4000-595-OR	B-595	Orange	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		141990	B30C-500-595-BK	B-595	Black	12.7	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		141989	B30C-1125-595-BK	B-595	Black	28.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		141988	B30C-2250-595-BK	B-595	Black	57.5	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3	✂	141987	B30C-4000-595-BK	B-595	Black	101.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		141998	B30C-500-595-BR	B-595	Brown	12.7	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		141997	B30C-1125-595-BR	B-595	Brown	28.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		141996	B30C-2250-595-BR	B-595	Brown	57.5	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3	✂	141995	B30C-4000-595-BR	B-595	Brown	101.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		142006	B30C-500-595-GD	B-595	Gold	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142005	B30C-1125-595-GD	B-595	Gold	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142004	B30C-2250-595-GD	B-595	Gold	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	142003	B30C-4000-595-GD	B-595	Gold	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142014	B30C-500-595-GY	B-595	Grey	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142013	B30C-1125-595-GY	B-595	Grey	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142012	B30C-2250-595-GY	B-595	Grey	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	142011	B30C-4000-595-GY	B-595	Grey	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142022	B30C-500-595-PL	B-595	Purple	12.7	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		142021	B30C-1125-595-PL	B-595	Purple	28.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		142020	B30C-2250-595-PL	B-595	Purple	57.5	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3	✂	142019	B30C-4000-595-PL	B-595	Purple	101.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		142002	B30C-500-595-CL	B-595	Clear	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142001	B30C-1125-595-CL	B-595	Clear	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		142000	B30C-2250-595-CL	B-595	Clear	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	141999	B30C-4000-595-CL	B-595	Clear	101.6	30.5m	1 roll (cont.)	B30-R10000

U.S. Patent Nos. 5,823,689; 6,570,602. Additional Patents Pending.

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



Low-Halide Polyester (B-569)

- Low-halide for labelling stainless steel pipes and surfaces
- Applies best to very smooth surfaces and ideal for mounting to rigid panels

Service temp: -40°C to 100°C Application temp: -17°C to 100°C
Average outdoor durability: 3–5 years




Figure 3

Diagram	For BBP37 XY-Cutter	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Roll Length B (m)	Labels Per Roll	Rec. Ribbon
Fig. 3		117989	B30C-500-569-WT	B-569	White	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117988	B30C-1125-569-WT	B-569	White	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117987	B30C-2250-569-WT	B-569	White	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117986	B30C-3000-569-WT	B-569	White	76.2	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117985	B30C-4000-569-WT	B-569	White	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117993	B30C-500-569-YL	B-569	Yellow	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117992	B30C-1125-569-YL	B-569	Yellow	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117991	B30C-2250-569-YL	B-569	Yellow	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117990	B30C-4000-569-YL	B-569	Yellow	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117976	B30C-500-569-RD	B-569	Red	12.7	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117975	B30C-1125-569-RD	B-569	Red	28.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117974	B30C-2250-569-RD	B-569	Red	57.5	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3	✂	117973	B30C-4000-569-RD	B-569	Red	101.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117936	B30C-500-569-BL	B-569	Blue	12.7	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117935	B30C-1125-569-BL	B-569	Blue	28.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117934	B30C-2250-569-BL	B-569	Blue	57.5	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3	✂	117933	B30C-4000-569-BL	B-569	Blue	101.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117956	B30C-500-569-LB	B-569	Light Blue	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117955	B30C-1125-569-LB	B-569	Light Blue	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117954	B30C-2250-569-LB	B-569	Light Blue	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117953	B30C-4000-569-LB	B-569	Light Blue	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117980	B30C-500-569-SB	B-569	Sky Blue	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117979	B30C-1125-569-SB	B-569	Sky Blue	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117978	B30C-2250-569-SB	B-569	Sky Blue	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117977	B30C-4000-569-SB	B-569	Sky Blue	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117948	B30C-500-569-GN	B-569	Green	12.7	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117947	B30C-1125-569-GN	B-569	Green	28.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117946	B30C-2250-569-GN	B-569	Green	57.5	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3	✂	117945	B30C-4000-569-GN	B-569	Green	101.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117964	B30C-500-569-OR	B-569	Orange	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117963	B30C-1125-569-OR	B-569	Orange	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117962	B30C-2250-569-OR	B-569	Orange	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117961	B30C-4000-569-OR	B-569	Orange	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117932	B30C-500-569-BK	B-569	Black	12.7	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117931	B30C-1125-569-BK	B-569	Black	28.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117930	B30C-2250-569-BK	B-569	Black	57.5	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3	✂	117929	B30C-4000-569-BK	B-569	Black	101.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117940	B30C-500-569-BR	B-569	Brown	12.7	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117939	B30C-1125-569-BR	B-569	Brown	28.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117938	B30C-2250-569-BR	B-569	Brown	57.5	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3	✂	117937	B30C-4000-569-BR	B-569	Brown	101.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117960	B30C-500-569-OC	B-569	Ochre	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117959	B30C-1125-569-OC	B-569	Ochre	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117958	B30C-2250-569-OC	B-569	Ochre	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117957	B30C-4000-569-OC	B-569	Ochre	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117984	B30C-500-569-TN	B-569	Tan	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117983	B30C-1125-569-TN	B-569	Tan	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117982	B30C-2250-569-TN	B-569	Tan	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117981	B30C-4000-569-TN	B-569	Tan	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117952	B30C-500-569-GY	B-569	Grey	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117951	B30C-1125-569-GY	B-569	Grey	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117950	B30C-2250-569-GY	B-569	Grey	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117949	B30C-4000-569-GY	B-569	Grey	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117972	B30C-500-569-PL	B-569	Purple	12.7	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117971	B30C-1125-569-PL	B-569	Purple	28.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117970	B30C-2250-569-PL	B-569	Purple	57.5	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3	✂	117969	B30C-4000-569-PL	B-569	Purple	101.6	30.5m	1 roll (cont.)	B30-R10000-WT
Fig. 3		117968	B30C-500-569-PK	B-569	Pink	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117967	B30C-1125-569-PK	B-569	Pink	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117966	B30C-2250-569-PK	B-569	Pink	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117965	B30C-4000-569-PK	B-569	Pink	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117944	B30C-500-569-CL	B-569	Clear	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117943	B30C-1125-569-CL	B-569	Clear	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117942	B30C-2250-569-CL	B-569	Clear	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117941	B30C-4000-569-CL	B-569	Clear	101.6	30.5m	1 roll (cont.)	B30-R10000

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



Pre-Printed GHS / CLP Chemical Labels (B-7569)

- Blank labels with pre-printed red diamonds allow the printer to produce 2-colour GHS / CLP labels in one print pass
- 4 sizes of labels with 7 diamond layouts that match templates in the printer app or in the Brady Workstation GHS App
- Indoor/outdoor vinyl and polyester material and durable inks withstand exposure to moisture, chemicals and handling

Service temp: -20°C to 82°C
 Application temp: 10°C to 82°C
 Average outdoor durability: 3–5 years



Part No.	Catalogue No.	B#	Material	Legend	Label Height (mm)	Label Width (mm)	Labels Per Roll	Rec. Ribbon
121633	B30-260-7569-CLP1	B-7569	Vinyl		55.0	85.0	340	B30-R10000
121639	B30-261-7569-CLP1	B-7569	Vinyl		75.0	110.0	270	B30-R10000
121645	B30-262-7569-CLP1	B-7569	Vinyl		105.0	155.0	200	B30-R10000
121634	B30-260-7569-CLP2	B-7569	Vinyl		55.0	85.0	340	B30-R10000
121640	B30-261-7569-CLP2	B-7569	Vinyl		75.0	110.0	270	B30-R10000
121646	B30-262-7569-CLP2	B-7569	Vinyl		105.0	155.0	200	B30-R10000
121635	B30-260-7569-CLP3A	B-7569	Vinyl		55.0	85.0	340	B30-R10000
121641	B30-261-7569-CLP3A	B-7569	Vinyl		75.0	110.0	270	B30-R10000
121647	B30-262-7569-CLP3A	B-7569	Vinyl		105.0	155.0	200	B30-R10000
121636	B30-260-7569-CLP3B	B-7569	Vinyl		55.0	85.0	340	B30-R10000
121642	B30-261-7569-CLP3B	B-7569	Vinyl		75.0	110.0	270	B30-R10000
121648	B30-262-7569-CLP3B	B-7569	Vinyl		105.0	155.0	200	B30-R10000
121637	B30-260-7569-CLP4A	B-7569	Vinyl		55.0	85.0	340	B30-R10000
121643	B30-261-7569-CLP4A	B-7569	Vinyl		75.0	110.0	270	B30-R10000
121649	B30-262-7569-CLP4A	B-7569	Vinyl		105.0	155.0	200	B30-R10000
121638	B30-260-7569-CLP4B	B-7569	Vinyl		55.0	85.0	340	B30-R10000
149503	B30-260-569-CLP4B	B-569	Polyester		55.0	85.0	340	B30-R10000
121644	B30-261-7569-CLP4B	B-7569	Vinyl		75.0	110.0	270	B30-R10000
149504	B30-261-569-CLP4B	B-569	Polyester		75.0	110.0	270	B30-R10000
121650	B30-262-7569-CLP4B	B-7569	Vinyl		105.0	155.0	200	B30-R10000
149505	B30-262-569-CLP4B	B-569	Polyester		105.0	155.0	200	B30-R10000
149209	B30-18-7569-CLP4C	B-7569	Vinyl		25.4	76.2	1000	B30-R10000

▶ Brady WorkStation GHS Label App

- Built-in pre-formatted label layouts and approved GHS symbols
- Pre-worded hazard statements and GHS symbols that just click and drag into the layout (no need to type everything in)
- Once you create a label, the data is there and you can print any size
- Automatic "block-out" of unused diamonds on pre-printed supplies so you can inventory fewer label rolls
- Database of the most commonly used chemicals



Visit Workstation.BradyID.com.au for a free 30-day trial



Pre-Printed Pre-Cut Blank Sign Headers (B-595)

- Allows printer to create multicolour signs fast — in a single print pass
- Headers meet AS 1319 standard for Danger and Warning signs.
- Indoor/outdoor grade material conforms to rough, highly textured and difficult-to-adhere-to surfaces

Service temp: -40°C to 82°C
 Application temp: -17°C to 82°C
 Average outdoor durability: 8–10 years
 Agency approvals: **RoHS**

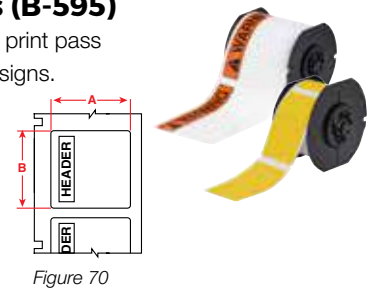


Diagram	B#	Material	Part No.	Header	Height A (mm)	Width B (mm)	Labels Per Roll	Rec. Ribbon
Fig. 70	B-595	Vinyl	142190		101.60	152.40	175	B30-R10000
Fig. 70	B-595	Vinyl	142191		57.15	76.20	300	B30-R10000
Fig. 70	B-595	Vinyl	872948		101.60	152.40	175	B30-R10000
Fig. 70	B-595	Vinyl	972946		57.15	76.20	300	B30-R10000
Fig. 70	B-595	Vinyl	142188		101.60	152.40	175	B30-R10000
Fig. 70	B-595	Vinyl	142189		57.15	76.20	300	B30-R10000
Fig. 70	B-595	Vinyl	142196		28.58	72.39	300	B30-R10000
Fig. 70	B-595	Vinyl	142195		57.15	76.20	300	B30-R10000
Fig. 70	B-595	Vinyl	142197		57.15	97.79	250	B30-R10000
Fig. 70	B-595	Vinyl	142194		101.60	152.40	175	B30-R10000
Fig. 70	B-595	Vinyl	142199		57.15	76.20	300	B30-R10000
Fig. 70	B-595	Vinyl	142198		57.15	97.79	250	B30-R10000



Non-Adhesive Tags (B-551)

- Non-adhesive, semi-rigid tags in pre-cut and continuous styles
- Pre-cut with hole and chamfered corners
- Micro-perforated between tags to separate cleanly

Service temp: -40°C to 89°C
 Average outdoor durability: up to 2 years




Diagram	Part No.	Catalogue No.	B#	Header	Tag Width A (mm)	Tag Height B (mm)	Tags Per Roll	Rec. Ribbon
Fig. 69	142223	B30-255-551-ANSIDA	B-551		82.6	146.1	100	B30-R10000
Fig. 69	142226	B30-255-551-WHT	B-551		82.6	146.1	100	B30-R10000
Fig. 33b	118013	B30C-2500-551-WT	B-551		63.5	15.2m	1 roll (cont.)	B30-R10000
Fig. 33b	118012	B30C-3250-551-WT	B-551		82.6	15.2m	1 roll (cont.)	B30-R10000
Fig. 33b	118011	B30C-4250-551-WT	B-551		107.9	15.2m	1 roll (cont.)	B30-R10000

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.

Safety Sign Blanks

Create custom signs in minutes – no lead time

Apply labels to blank safety signs with preprinted headers, to create personal and professional signs for your workplace. Ideal for use with BBP®85, GlobalMark®2, BradyPrinter S3100, BBP®31, BBP®33, MiniMark™ or BMP™71 printers.



Print text or pictogram | Remove liner | Apply to blank sign panel.



Part No.	Material	Header	Width (mm)	Height (mm)
832521	Metal		600	450
841950	Polypropylene		600	450
832520	Metal		450	300
841951	Polypropylene		450	300
841953	Metal		300	225
841952	Polypropylene		300	225
832527	Metal		600	450
841935	Polypropylene		600	450
832526	Metal		450	300
841936	Polypropylene		450	300
841938	Metal		300	225
841937	Polypropylene		300	225
833308	Metal		450	600
863509	Polypropylene		450	600
833309	Metal		300	450
841928	Polypropylene		300	450
841930	Metal		225	300
863510	Polypropylene		225	300
841916	Metal		600	450
841915	Polypropylene		600	450
863513	Metal		450	300
863512	Polypropylene		450	300
841920	Metal		300	225
841919	Polypropylene		300	225
834071	Metal		600	450
841969	Polypropylene		600	450
834070	Metal		450	300
841970	Polypropylene		450	300
863514	Metal		300	225
841971	Polypropylene		300	225



Paper Labels (B-424)

- Economical matte labels for light duty general ID
- Excellent contrast and smear resistance for barcode printing

Service temp: -40°C to 51°C
Agency approvals:



Fits Printer Model(s)	For BBP37 XY-Cutter	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Label Height B (mm)	Labels Per Roll	Rec. Ribbon
BBP33		Fig. 2	133883	B33-53-424	B-424	White	50.8	12.7	2500	B30-R4300
BBP33		Fig. 2	143086	B33-17-424	B-424	White	50.8	25.4	1500	B30-R4300
BBP33		Fig. 2	133964	B33-7-424	B-424	White	69.9	31.8	1000	B30-R4300
BBP33		Fig. 2	143080	B33-18-424	B-424	White	76.2	25.4	1500	B30-R4300
BBP33		Fig. 2	143070	B33-19-424	B-424	White	76.2	50.8	500	B30-R4300
BBP33		Fig. 2	133832	B33-20-424	B-424	White	76.2	127	250	B30-R4300
BBP33		Fig. 2	133894	B33-55-424	B-424	White	101.6	50.8	750	B30-R4300
BBP33		Fig. 2	143069	B33-25-424	B-424	White	101.6	152.4	350	B30-R4300
S3100, BBP35, 37		Fig. 3	145298	B30C-4000-424	B-424	White	101.6	45.7m	1 roll (cont.)	B30-R4300

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



Polypropylene Labels (B-425)

- General labelling material for indoor use
- Outstanding chemical and solvent resistance and print performance
- Not recommended for prolonged outdoor use (use B-595 material for 8-10 year outdoor use)

Service temp: -70°C to 100°C

Agency approvals:




Figure 1




Figure 2

Fits Printer Model(s)	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Label Height B (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33	Fig. 1	142962	B33-5-425	B-425	White	25.4	12.7	3	5000	B30-R4300
BBP33	Fig. 2	142891	B33-17-425	B-425	White	50.8	25.4	1	1500	B30-R4300
BBP33	Fig. 2	142892	B33-18-425	B-425	White	76.2	25.4	1	1500	B30-R4300
BBP33	Fig. 2	143053	B33-19-425	B-425	White	76.2	50.8	1	500	B30-R4300



Retro Reflective Tape (B-584)

- Highly reflective material shines back brightly when struck by light
- Ideal for labelling outdoor utility pedestals, hard hats, jobsite equipment and roof-top equipment
- Recommended for low light or inclement weather conditions

Service temp: -40°C to 70°C

Application temp: -17°C to 70°C (yellow & orange), 10°C to 70°C (silver)

Average outdoor durability: 4-6 years




Figure 3



Diagram	For BBP37 XY-Cutter	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Roll Length B (m)	Labels Per Roll	Rec. Ribbon
Fig. 3		117999	B30C-1125-584-SL	B-584	Silver	28.6	15.2m	1 roll (cont.)	B30-R10000
Fig. 3		117998	B30C-2250-584-SL	B-584	Silver	57.5	15.2m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117997	B30C-4000-584-SL	B-584	Silver	101.6	15.2m	1 roll (cont.)	B30-R10000
Fig. 3		118002	B30C-1125-584-YL	B-584	Yellow	28.6	15.2m	1 roll (cont.)	B30-R10000
Fig. 3		118001	B30C-2250-584-YL	B-584	Yellow	57.5	15.2m	1 roll (cont.)	B30-R10000
Fig. 3	✂	118000	B30C-4000-584-YL	B-584	Yellow	101.6	15.2m	1 roll (cont.)	B30-R10000
Fig. 3		117996	B30C-1125-584-OR	B-584	Orange	28.6	15.2m	1 roll (cont.)	B30-R10000
Fig. 3		117995	B30C-2250-584-OR	B-584	Orange	57.5	15.2m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117994	B30C-4000-584-OR	B-584	Orange	101.6	15.2m	1 roll (cont.)	B30-R10000



BradyGlo™ High-Intensity Photoluminescent Tape (B-526)

- For glow-in-the-dark identification up to 10 hours
- Designed for directional, evacuation, emergency utility shut-off, fire extinguisher, alarm pull and vital equipment control marking
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26

Service temp: -40°C to 60°C

Application temp: 4°C to 60°C




Figure 3



Diagram	For BBP37 XY-Cutter	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Roll Length B (m)	Labels Per Roll	Rec. Ribbon
Fig. 3		117928	B30C-1125-526	B-526	Luminous Green	28.6	15.2m	1 roll (cont.)	B30-R10000
Fig. 3		117926	B30C-2250-526	B-526	Luminous Green	57.5	15.2m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117924	B30C-4000-526	B-526	Luminous Green	101.6	15.2m	1 roll (cont.)	B30-R10000

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



ToughStripe® Printable Floor Marking Tape (B-483 with overlamine)

- Revolutionary B-483 material has ultra-aggressive adhesive
- Withstands forklift and pallet jack traffic without tearing or lifting
- Each roll ships with a roll of clear overlamine which must be applied over printed label and onto appropriate surface for best performance

Service temp: -40°C to 120°C
Agency approvals:




Figure 3



Fits Printer Model(s)	Diagram	For BBP37 XY-Cutter	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Roll Length B (m)	Labels Per Roll	Rec. Ribbon
S3100, BBP35, 37	Fig. 3		139950	B30C-1125-483WT-KT	B-483	White	28.6	30.5m	1 Roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3		139949	B30C-2250-483WT-KT	B-483	White	57.5	30.5m	1 Roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3		139948	B30C-3000-483WT-KT	B-483	White	76.2	30.5m	1 Roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3	✂	139947	B30C-4000-483WT-KT	B-483	White	101.6	30.5m	1 Roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3		139946	B30C-1125-483YL-KT	B-483	Yellow	28.6	30.5m	1 Roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3		139945	B30C-2250-483YL-KT	B-483	Yellow	57.5	30.5m	1 Roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3		139944	B30C-3000-483YL-KT	B-483	Yellow	76.2	30.5m	1 Roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3	✂	139943	B30C-4000-483YL-KT	B-483	Yellow	101.6	30.5m	1 Roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3		139942	B30C-1125-483RD-KT	B-483	Red	28.6	30.5m	1 Roll (cont.)	B30-R4400-WT
S3100, BBP35, 37	Fig. 3		139941	B30C-2250-483RD-KT	B-483	Red	57.5	30.5m	1 Roll (cont.)	B30-R4400-WT
S3100, BBP35, 37	Fig. 3	✂	139940	B30C-4000-483RD-KT	B-483	Red	101.6	30.5m	1 Roll (cont.)	B30-R4400-WT
S3100, BBP35, 37	Fig. 3		139939	B30C-1125-483BL-KT	B-483	Blue	28.6	30.5m	1 Roll (cont.)	B30-R4400-WT
S3100, BBP35, 37	Fig. 3		139938	B30C-2250-483BL-KT	B-483	Blue	57.5	30.5m	1 Roll (cont.)	B30-R4400-WT
S3100, BBP35, 37	Fig. 3	✂	139937	B30C-4000-483BL-KT	B-483	Blue	101.6	30.5m	1 Roll (cont.)	B30-R4400-WT
S3100, BBP35, 37	Fig. 3		139936	B30C-1125-483GN-KT	B-483	Green	28.6	30.5m	1 Roll (cont.)	B30-R4400-WT
S3100, BBP35, 37	Fig. 3		139935	B30C-2250-483GN-KT	B-483	Green	57.5	30.5m	1 Roll (cont.)	B30-R4400-WT
S3100, BBP35, 37	Fig. 3	✂	139934	B30C-4000-483GN-KT	B-483	Green	101.6	30.5m	1 Roll (cont.)	B30-R4400-WT
S3100, BBP35, 37	Fig. 3		139933	B30C-1125-483BK-KT	B-483	Black	28.6	30.5m	1 Roll (cont.)	B30-R4400-WT
S3100, BBP35, 37	Fig. 3		139932	B30C-2250-483BK-KT	B-483	Black	57.5	30.5m	1 Roll (cont.)	B30-R4400-WT
S3100, BBP35, 37	Fig. 3	✂	139931	B30C-4000-483BK-KT	B-483	Black	101.6	30.5m	1 Roll (cont.)	B30-R4400-WT
S3100, BBP35, 37	Fig. 3		139930	B30C-1125-483OR-KT	B-483	Orange	28.6	30.5m	1 Roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3		139929	B30C-2250-483OR-KT	B-483	Orange	57.5	30.5m	1 Roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3	✂	139928	B30C-4000-483OR-KT	B-483	Orange	101.6	30.5m	1 Roll (cont.)	B30-R6000

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



Printable Magnetic Supply (B-509)

- Easiest and quickest material for removing and repositioning
- Non-adhesive magnetic material that can be printed on directly

Service temp: -17°C to 70°C
Average outdoor durability: 3-5 years



Figure 33b




Diagram	For BBP37 XY-Cutter	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Roll Length B (m)	Labels Per Roll	Rec. Ribbon
Fig. 33b		117917	B30C-2500-509-WT	B-509	White	63.5	7.62m	1 roll (cont.)	B30-R10000
Fig. 33b	✂	117916	B30C-4250-509-WT	B-509	White	107.8	7.62m	1 roll (cont.)	B30-R10000
Fig. 33b		117919	B30C-2500-509-YL	B-509	Yellow	63.5	7.62m	1 roll (cont.)	B30-R10000
Fig. 33b	✂	117918	B30C-4250-509-YL	B-509	Yellow	107.8	7.62m	1 roll (cont.)	B30-R10000



Repositionable Vinyl (B-581)

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable labels, such as 5S and lean inventory labels

Service temp: -40°C to 82°C
Application temp: 10°C to 82°C
Average outdoor durability: 5 years




Figure 3



Diagram	For BBP37 XY-Cutter	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Roll Length B (m)	Labels Per Roll	Rec. Ribbon
Fig. 3		118006	B30C-500-581-WT	B-581	White	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		118005	B30C-1125-581-WT	B-581	White	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		118004	B30C-2250-581-WT	B-581	White	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	118003	B30C-4000-581-WT	B-581	White	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		118010	B30C-500-581-YL	B-581	Yellow	12.7	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		118009	B30C-1125-581-YL	B-581	Yellow	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		118008	B30C-2250-581-YL	B-581	Yellow	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	118007	B30C-4000-581-YL	B-581	Yellow	101.6	30.5m	1 roll (cont.)	B30-R10000



Cold Temperature Application Material (B-549)

- Special adhesive permanently adheres to extremely cold surfaces
- Ideal for cold storage warehouses, coolers, freezers and short-term winter outdoor use

Service temp: -40°C to 100°C
Application temp: -23°C to 100°C
Average outdoor durability: up to 1 year




Figure 3



Diagram	For BBP37 XY-Cutter	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Roll Length B (m)	Labels Per Roll	Rec. Ribbon
Fig. 3		117862	B30C-1125-549-WT	B-549	White	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117861	B30C-2250-549-WT	B-549	White	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117860	B30C-4000-549-WT	B-549	White	101.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117865	B30C-1125-549-YL	B-549	Yellow	28.6	30.5m	1 roll (cont.)	B30-R10000
Fig. 3		117864	B30C-2250-549-YL	B-549	Yellow	57.5	30.5m	1 roll (cont.)	B30-R10000
Fig. 3	✂	117863	B30C-4000-549-YL	B-549	Yellow	101.6	30.5m	1 roll (cont.)	B30-R10000

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



ToughWash® Washdown Resistant Labels (B-854, B-855)

- Withstands high pressure, heat, harsh chemicals and numerous washdown cycles
- Ideal for use in the food and beverage industry
- B-854 offers metal detectable layer to detect foreign debris in food stream

Service temp: -40°C to 110°C
Agency approvals: **RoHS**




Figure 3




Figure 73



Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Length B (mm)	Labels Per Roll	Rec. Ribbon
B-854 ToughWash™ Metal Detectable Material								
Fig. 3	133119	B30C-4000-854-YL	B-854		101.06	15.2 m	1 roll (cont.)	B30-R6000
Fig. 3	133120	B30C-4000-854-WT	B-854		101.06	15.2 m	1 roll (cont.)	B30-R6000
Fig. 73	139804	B30-25-854-OSHADA	B-854		101.06	158.8	100	B30-R6000
B-855 ToughWash™ Material								
Fig. 3	133146	B30C-1125-855-YL	B-855		28.6	15.2 m	1 roll (cont.)	B30-R6000
Fig. 3	133142	B30C-2250-855-YL	B-855		57.5	15.2 m	1 roll (cont.)	B30-R6000
Fig. 3	133144	B30C-4000-855-YL	B-855		101.06	15.2 m	1 roll (cont.)	B30-R6000
Fig. 3	133147	B30C-1125-855-WT	B-855		28.6	15.2 m	1 roll (cont.)	B30-R6000
Fig. 3	133143	B30C-2250-855-WT	B-855		57.5	15.2 m	1 roll (cont.)	B30-R6000
Fig. 3	133145	B30C-4000-855-WT	B-855		101.06	15.2 m	1 roll (cont.)	B30-R6000
Fig. 73	139803	B30-25-855 OSHADA	B-855		101.06	158.8	100	B30-R6000

TOUGHWASH™ Harsh Washdown Labels

ToughWash™ washdown resistant labels can handle the pressures of high heat, harsh chemicals, high pressure sprays and multiple washdown cycles found in food and beverage processors. An ideal labelling solution for the Food & Beverage manufacturing plants.

Developed and tested by Brady material scientists using real washdown processes, these labels combine superior print durability with long lasting label constructions that won't fall apart or fall off.



All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



General ID Labels for Lean 5S, Bins and Production Areas (B-483, B-484, B-498, B-499)

- Various sizes in several durable material types
- Also ideal for marking backer board, DIN rail, relays, PLCs, switches, solenoids, drive motors and other components inside panels
- All recommended materials are flexible and have high-tack adhesives for adhesion to wide variety of surfaces and components

B-483: Service temp: -40°C to 120°C Agency approvals:
B-484: Service temp: -40°C to 115°C Agency approvals:
B-498: Service temp: -40°C to 79°C Agency approvals:
B-499: Service temp: -40°C to 89°C Agency approvals:




Figure 1




Figure 2




Figure 3

Fits Printer Model(s)	For BBP37 XY-Cutter	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Label Height B (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Vinyl Cloth - Aggressive but repositionable adhesive (B-498):											
BBP33		Fig. 1	142875	B33-90-498	B-498	White	6.4	36.5	6	2500	B30-R6200
BBP33		Fig. 1	143074	B33-68-498	B-498	White	12.7	19.1	4	5000	B30-R6200
BBP33		Fig. 1	143009	B33-87-498	B-498	White	12.7	36.5	6	2500	B30-R6200
BBP33		Fig. 1	142872	B33-1-498	B-498	White	19.1	6.4	4	5000	B30-R6200
BBP33		Fig. 1	142876	B33-95-498	B-498	White	20.3	36.5	3	2300	B30-R6200
BBP33		Fig. 1	142966	B33-5-498	B-498	White	25.4	12.7	3	5000	B30-R6200
BBP33		Fig. 1	142874	B33-88-498	B-498	White	25.4	19.1	2	2500	B30-R6200
BBP33		Fig. 1	142967	B33-89-498	B-498	White	25.4	36.5	3	2300	B30-R6200
S3100, BBP35, 37		Fig. 3	149181	B30C-4000-498	B-498	White	101.6	24.4m	1 roll (cont.)		B30-R6200
Nylon Cloth - Permanent adhesive (B-499):											
BBP33		Fig. 1	143018	B33-68-499	B-499	White	12.7	19.1	4	1500	B30-R6000
BBP33		Fig. 1	143002	B33-165-499	B-499	White	20.3	36.5	4	2500	B30-R6000
BBP33		Fig. 2	142995	B33-125-499	B-499	White	22.9	12.7	1	1500	B30-R6000
BBP33		Fig. 1	143011	B33-126-499	B-499	White	22.9	12.7	2	1500	B30-R6000
BBP33		Fig. 2	143001	B33-163-499	B-499	White	25.4	9.5	1	1500	B30-R6000
BBP33		Fig. 1	143017	B33-152-499	B-499	White	25.4	9.5	2	1500	B30-R6000
BBP33		Fig. 2	142997	B33-136-499	B-499	White	38.1	19.1	1	1500	B30-R6000
BBP33		Fig. 2	143066	B33-137-499	B-499	White	50.8	25.4	1	1100	B30-R6000
BBP33		Fig. 2	142995	B33-125-499	B-499	White	50.8	6.4	1	1500	B30-R6000
Polyester - Ultra aggressive adhesive for highly textured and low surface energy surfaces (B-483):											
BBP33		Fig. 1	133806	B33-149-483	B-483	White	12.7	12.7	4	5000	B30-R6000
BBP33		Fig. 1	143075	B33-5-483	B-483	White	25.4	12.7	3	5000	B30-R6000
BBP33		Fig. 2	143084	B33-17-483	B-483	White	50.8	25.4	1	1500	B30-R6000
BBP33		Fig. 2	133965	B33-7-483	B-483	White	69.9	31.8	1	1000	B30-R6000
BBP33		Fig. 2	143079	B33-18-483	B-483	White	76.2	25.4	1	1500	B30-R6000
BBP33		Fig. 2	142956	B33-19-483	B-483	White	76.2	50.8	1	500	B30-R6000
BBP33		Fig. 2	133897	B33-55-483	B-483	White	101.6	50.8	1	750	B30-R6000
Polyester - Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484):											
BBP33		Fig. 2	133786	B33-125-484	B-484	White	22.9	12.7	1	1500	B30-R6000
BBP33		Fig. 1	133892	B33-5-484	B-484	White	25.4	12.7	3	5000	B30-R6000
BBP33		Fig. 2	133787	B33-136-484	B-484	White	38.1	19.1	1	1500	B30-R6000
BBP33		Fig. 2	133816	B33-17-484	B-484	White	50.8	25.4	1	1500	B30-R6000
BBP33		Fig. 2	133824	B33-18-484	B-484	White	76.2	25.4	1	1500	B30-R6000
BBP33		Fig. 2	133830	B33-19-484	B-484	White	76.2	50.8	1	500	B30-R6000
S3100, BBP35, 37		Fig. 3	145295	B30C-4000-484	B-484	White	101.6	45.7m	1 roll (cont)		B30-R6000





All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



Self-Laminating Wire & Cable Labels (B-427)

- Features white printable area with clear "tail" that wraps around marker to protect text
- Superior resistance to abrasion, handling, solvents, water, oil and dirt
- Vinyl with permanent acrylic adhesive designed specifically for tightly curved surfaces

Service temp: -40°C to 70°C
Agency approvals:



Fits Printer Model(s)	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Label Height B (mm)	Print Area Height F (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33	Fig. 12	143094	B33-80-427	B-427	White	12.7	19.1	9.5	4	2500	B30-R4300
BBP33	Fig. 12	143101	B33-113-427	B-427	White	12.7	25.4	9.5	4	2500	B30-R4300
BBP33	Fig. 12	143092	B33-8-427	B-427	White	12.7	36.5	12.7	5	5000	B30-R4300
BBP33	Fig. 12	143097	B33-56-427	B-427	White	19.1	23.8	9.5	4	5000	B30-R4300
BBP33	Fig. 12	143008	B33-73-427	B-427	White	19.1	44.6	12.7	4	3500	B30-R4300
BBP33	Fig. 12	143096	B33-74-427	B-427	White	20.3	36.5	12.7	4	4000	B30-R4300
BBP33	Fig. 12	133780	B33-115-427	B-427	White	25.4	19.1	9.5	2	2500	B30-R4300
BBP33	Fig. 12	143102	B33-116-427	B-427	White	25.4	25.4	9.5	2	2500	B30-R4300
BBP33	Fig. 12	143091	B33-9-427	B-427	White	25.4	36.5	12.7	3	2500	B30-R4300
BBP33	Fig. 12	143095	B33-75-427	B-427	White	25.4	57.2	19.1	2	1400	B30-R4300
BBP33	Fig. 15	142996	B33-131-427	B-427	White	25.4	66.7	25.4	1	1500	B30-R4300
BBP33	Fig. 12	143099	B33-10-427	B-427	White	25.4	95.3	25.4	3	1200	B30-R4300
BBP33	Fig. 12	143093	B33-81-427	B-427	White	25.4	152.4	38.1	2	500	B30-R4300
BBP33	Fig. 9a	142952	B33-135-427AW	B-427	White	38.1	19.1	-	1	1500	B30-R4300
BBP33	Fig. 14	143042	B33-118-427	B-427	White	38.1	25.4	9.5	1	1250	B30-R4300
BBP33	Fig. 14	142870	B33-119-427	B-427	White	38.1	38.1	12.7	1	1000	B30-R4300
BBP33	Fig. 14	133841	B33-272-427	B-427	White	38.1	57.2	19.1	1	700	B30-R4300
BBP33	Fig. 14	142994	B33-120-427	B-427	White	44.5	25.4	9.5	1	1250	B30-R4300
BBP33	Fig. 14	142871	B33-121-427	B-427	White	44.5	38.1	12.7	1	1000	B30-R4300
BBP33	Fig. 14	133842	B33-273-427	B-427	White	44.5	57.2	19.1	1	500	B30-R4300
BBP33	Fig. 9a	143045	B33-137-427AW	B-427	White	50.8	25.4	-	1	1500	B30-R4300
BBP33	Fig. 14	143098	B33-27-427	B-427	White	50.8	95.3	25.4	1	400	B30-R4300
BBP33	Fig. 14	142882	B33-26-427	B-427	White	63.5	57.2	19.1	1	500	B30-R4300
BBP33	Fig. 14	133977	B33-82-427	B-427	White	50.8	152.4	38.1	1	200	B30-R4300



Patch Panel Adhesive Strips (B-422)

- Continuous supply in 3 widths to make labelling patch panels and other datacomm components quick and easy
- Aggressive adhesive suitable for rough, highly textured and powder-coated surfaces as well as smooth surfaces

Service temp: -40°C to 100°C
Agency approvals:




Figure 3



Fits Printer Model(s)	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Roll Length B (m)	Labels Per Roll	Rec. Ribbon
BBP33	Fig. 3	134003	B33C-312-422	B-422	White	7.9	25.9m	1 roll (cont.)	B30-R6000
BBP33	Fig. 3	134004	B33C-375-422	B-422	White	9.5	25.9m	1 roll (cont.)	B30-R6000

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



Vinyl Cloth Adhesive Wire & Cable Labels (B-498)

- A vinyl cloth label for marking wires, cables and inside-panel components
- A highly unique adhesive and cloth construction gives excellent holding power and still allows for clean removal and reapplication
- Ideal choice for marking both ends of a wire that you may need to cut shorter before final termination

Service temp: -40°C to 79°C
Agency approvals:




Figure 1



Fits Printer Model(s)	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Label Height B (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33	Fig. 1	142875	B33-90-498	B-498	White	6.4	36.5	6	2500	B30-R6200
BBP33	Fig. 1	143074	B33-68-498	B-498	White	12.7	19.1	4	5000	B30-R6200
BBP33	Fig. 1	143009	B33-87-498	B-498	White	12.7	36.5	6	2500	B30-R6200
BBP33	Fig. 1	142872	B33-1-498	B-498	White	19.1	6.4	4	5000	B30-R6200
BBP33	Fig. 1	143073	B33-91-498	B-498	White	19.1	23.8	4	2500	B30-R6200
BBP33	Fig. 1	142876	B33-95-498	B-498	White	20.3	36.5	3	2300	B30-R6200
BBP33	Fig. 1	142966	B33-5-498	B-498	White	25.4	12.7	3	5000	B30-R6200
BBP33	Fig. 1	142874	B33-88-498	B-498	White	25.4	19.1	2	2500	B30-R6200
BBP33	Fig. 1	142967	B33-89-498	B-498	White	25.4	36.5	3	2300	B30-R6200



Terminal Block Adhesive Strips (B-498)

- Specially designed narrow-width continuous label for alignment on terminal blocks and patch panels
- Highly unique adhesive and vinyl cloth construction gives excellent holding power and still allows for clean removal and reapplication

Service temp: -40°C to 79°C
Agency approvals:




Figure 3



Fits Printer Model(s)	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Roll Length B (m)	Labels Per Roll	Rec. Ribbon
BBP33	Fig. 3	143064	B33C-312-498	B-498	White	7.9	25.9m	1 roll (cont.)	B30-R6200
BBP33	Fig. 3	143072	B33C-375-498	B-498	White	9.5	25.9m	1 roll (cont.)	B30-R6200

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



Tedlar® Adhesive Wire & Cable Labels (B-437)

- Topcoated polyvinylidene fluoride label for wire & cable marking where high temperature and self-extinguishing features are required
- Heavy duty performance with excellent resistance to water, oil and other fluids
- Meets MIL-M-87958 Standard

Service temp: -70°C to 135°C

Agency approvals: **RoHS**




Figure 1




Figure 3




Figure 4

Fits Printer Model(s)	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Label Height B (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33	Fig. 4	133776	B33-11-437	B-437	White	6.4	6.4	12	15000	B30-R4300
BBP33	Fig. 1	133791	B33-1-437	B-437	White	19.1	6.4	4	5000	B30-R4300
BBP33	Fig. 1	133833	B33-2-437	B-437	White	22.9	6.4	3	5000	B30-R4300
BBP33	Fig. 1	133888	B33-5-437	B-437	White	25.4	12.7	3	5000	B30-R4300
BBP33	Fig. 1	133846	B33-29-437	B-437	White	31.8	9.5	2	5000	B30-R4300
BBP33	Fig. 1	133889	B33-5-437YL	B-437	Yellow	25.4	12.7	3	5000	B30-R4300
BBP33	Fig. 1	133847	B33-29-437YL	B-437	Yellow	31.8	9.5	2	5000	B30-R4300
Continuous Rolls										
BBP33	Fig. 3	133980	B33C-1000-437	B-437	White	25.4	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133984	B33C-1500-437	B-437	White	38.1	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133990	B33C-2000-437	B-437	White	50.8	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133997	B33C-3000-437	B-437	White	76.2	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133981	B33C-1000-437YL	B-437	Yellow	25.4	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133985	B33C-1500-437YL	B-437	Yellow	38.1	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133991	B33C-2000-437YL	B-437	Yellow	50.8	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133998	B33C-3000-437YL	B-437	Yellow	76.2	25.9m	1 roll (cont.)		B30-R4300



Polyimide High Temp Adhesive Wire & Cable Labels (B-472)

- Topcoated polyimide label for wire and cable marking where high temperature and self-extinguishing features are required
- Heavy duty performance with excellent resistance to water, oil and other fluids

Service temp: -70°C to 160°C

Agency approvals: **RoHS**




Figure 1




Figure 3




Figure 4

Fits Printer Model(s)	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Label Height B (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
BBP33	Fig. 4	133778	B33-11-472	B-472	White	6.4	6.4	12	15000	B30-R4300
BBP33	Fig. 1	133796	B33-1-472	B-472	White	19.1	6.4	4	5000	B30-R4300
BBP33	Fig. 1	133835	B33-2-472	B-472	White	22.9	6.4	3	5000	B30-R4300
BBP33	Fig. 1	133890	B33-5-472	B-472	White	25.4	12.7	3	5000	B30-R4300
BBP33	Fig. 1	133849	B33-29-472	B-472	White	31.8	9.5	2	5000	B30-R4300
BBP33	Fig. 1	133891	B33-5-472YL	B-472	Yellow	25.4	12.7	3	5000	B30-R4300
BBP33	Fig. 1	133850	B33-29-472YL	B-472	Yellow	31.8	9.5	2	5000	B30-R4300
Continuous Rolls										
BBP33	Fig. 3	133982	B33C-1000-472	B-472	White	25.4	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133986	B33C-1500-472	B-472	White	38.1	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133992	B33C-2000-472	B-472	White	50.8	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133999	B33C-3000-472	B-472	White	76.2	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133983	B33C-1000-472YL	B-472	Yellow	25.4	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133987	B33C-1500-472YL	B-472	Yellow	38.1	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	133993	B33C-2000-472YL	B-472	Yellow	50.8	25.9m	1 roll (cont.)		B30-R4300
BBP33	Fig. 3	134002	B33C-3000-472YL	B-472	Yellow	76.2	25.9m	1 roll (cont.)		B30-R4300

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



PermaSleeve® LSZH Low Smoke Zero Halogen Polyolefin Wire Marking Sleeves (B-7641)

Military/Industrial Grade. 2:1 Shrink ratio.

- Low halogen wire marking sleeves offer outstanding fire safety properties and minimal smoke emission
- Meets the following industry specifications:
 - SAE-AS-81531 - MIL-STD-202
 - Tested per ASTM E162, ASTM E662

Service temp: -30°C to 105°C **RoHS**




Figure 20

Fits Printer Model	Diagram	Part No.	Catalogue No.	B#	Colour	For Wire Diameters (mm)		Supplied Diameter B (mm)	Recovered Diameter (mm)	Recovered Wall Thickness (mm)	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
						Min.	Max.						
3:1 Shrink ratio double-side printable, 50mm sleeve width (dimension A):													
BBP33	Fig. 20	140928	B33D-94-2-7641	B-7641	White	1.2	- 2.0	2.4	1.2	0.5 +/- 0.07	1	1000	B30-R6000
BBP33	Fig. 20	140929	B33D-125-2-7641	B-7641	White	1.6	- 2.8	3.2	1.6	0.5 +/- 0.07	1	1000	B30-R6000
BBP33	Fig. 20	140930	B33D-187-2-7641	B-7641	White	2.4	- 3.8	4.8	2.4	0.5 +/- 0.07	1	450	B30-R6000
BBP33	Fig. 20	140931	B33D-250-2-7641	B-7641	White	3.2	- 5.5	6.4	3.2	0.6 +/- 0.07	1	500	B30-R6000
BBP33	Fig. 20	140932	B33D-375-2-7641	B-7641	White	4.8	- 8.1	9.5	4.8	0.6 +/- 0.07	1	500	B30-R6000
BBP33	Fig. 20	140933	B33D-500-2-7641	B-7641	White	6.4	- 11.4	12.7	6.4	0.6 +/- 0.07	1	225	B30-R6000
BBP33	Fig. 20	140934	B33D-750-2-7641	B-7641	White	9.5	- 17.8	19.0	9.5	0.8 +/- 0.07	1	150	B30-R6000
BBP33	Fig. 20	140935	B33D-1000-2-7641	B-7641	White	11.4	- 24.1	25.4	12.7	0.9 +/- 0.1	1	150	B30-R6000
BBP33	Fig. 20	140936	B33D-1500-2-7641	B-7641	White	19.0	- 35.6	38.1	19.1	1.0 +/- 0.2	1	50	B30-R6000
BBP33	Fig. 20	140919	B33D-94-2-7641Y	B-7641	Yellow	1.2	- 2.0	2.4	1.2	0.5 +/- 0.07	1	1000	B30-R6000
BBP33	Fig. 20	140920	B33D-125-2-7641Y	B-7641	Yellow	1.6	- 2.8	3.2	1.6	0.5 +/- 0.07	1	1000	B30-R6000
BBP33	Fig. 20	140921	B33D-187-2-7641Y	B-7641	Yellow	2.4	- 3.8	4.8	2.4	0.5 +/- 0.07	1	450	B30-R6000
BBP33	Fig. 20	140922	B33D-250-2-7641Y	B-7641	Yellow	3.2	- 5.5	6.4	3.2	0.6 +/- 0.07	1	500	B30-R6000
BBP33	Fig. 20	140923	B33D-375-2-7641Y	B-7641	Yellow	4.8	- 8.1	9.5	4.8	0.6 +/- 0.07	1	500	B30-R6000
BBP33	Fig. 20	140924	B33D-500-2-7641Y	B-7641	Yellow	6.4	- 11.4	12.7	6.4	0.6 +/- 0.07	1	225	B30-R6000
BBP33	Fig. 20	140925	B33D-750-2-7641Y	B-7641	Yellow	9.5	- 17.8	19.0	9.5	0.8 +/- 0.07	1	150	B30-R6000
BBP33	Fig. 20	140926	B33D-1000-2-7641Y	B-7641	Yellow	11.4	- 24.1	25.4	12.7	0.9 +/- 0.1	1	150	B30-R6000
BBP33	Fig. 20	140927	B33D-1500-2-7641Y	B-7641	Yellow	19.0	- 35.6	38.1	19.1	1.0 +/- 0.2	1	50	B30-R6000

PermaSleeve® HX Polyolefin Wire Marking Sleeves (B-7642)

Military/Industrial Grade. 2:1 Shrink ratio.

- Flame retardant and high-temp rated but not as high temp as B-345 "HT" sleeves
- Meets the following industry specifications:
 - SAE-AMS-DTL-23053/5 (class 1 and 3) - SAE-AS-81531
 - MIL-STD-202 - Tested per ASTM E162, ASTM E662

Service temp: -40°C to 120°C (short burst max temp: 5 min at 240°C, 24 hrs at 160°C) **RoHS**




Figure 20

Fits Printer Model	Diagram	Part No.	Catalogue No.	B#	Colour	For Wire Gauge (approx.)	For Wire Diameters (mm)		Supplied Diameter B (mm)	Recovered Diameter (mm)	Recovered Wall Thickness (mm)	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
							Min.	Max.						
3:1 Shrink ratio single-side printable, 50mm sleeve width (dimension A):														
BBP33	Fig. 20	142897	B33-94-2-7642	B-7642	White	24 to 20	1.2	- 2.0	2.4	1.2	0.5 +/- 0.07	1	500	B30-R4300
BBP33	Fig. 20	142898	B33-125-2-7642	B-7642	White	20 to 16	1.6	- 2.8	3.2	1.6	0.5 +/- 0.07	1	500	B30-R4300
BBP33	Fig. 20	142899	B33-187-2-7642	B-7642	White	16 to 10	2.4	- 3.8	4.8	2.4	0.5 +/- 0.07	1	450	B30-R4300
BBP33	Fig. 20	142900	B33-250-2-7642	B-7642	White	12 to 8	3.2	- 5.5	6.4	3.2	0.6 +/- 0.07	1	400	B30-R4300
BBP33	Fig. 20	142901	B33-375-2-7642	B-7642	White	8 to 4	4.8	- 8.1	9.5	4.8	0.6 +/- 0.07	1	250	B30-R4300
BBP33	Fig. 20	142902	B33-500-2-7642	B-7642	White	6 to 1	6.4	- 11.4	12.7	6.4	0.6 +/- 0.07	1	225	B30-R4300
BBP33	Fig. 20	142903	B33-750-2-7642	B-7642	White	2 to 4/0	9.5	- 17.8	19.0	9.5	0.8 +/- 0.07	1	150	B30-R4300
BBP33	Fig. 20	142904	B33-1000-2-7642	B-7642	White	2/0 to 0.950 dia	11.4	- 24.1	25.4	12.7	0.9 +/- 0.1	1	150	B30-R4300
BBP33	Fig. 20	142905	B33-1500-2-7642	B-7642	White	N/A	19.0	- 35.6	38.1	19.1	1.0 +/- 0.2	1	50	B30-R4300
BBP33	Fig. 20	142906	B33-2000-2-7642	B-7642	White	N/A	25.4	- 48.3	50.8	25.4	1.1 +/- 0.2	1	50	B30-R4300
3:1 Shrink ratio double-side printable, 50mm sleeve width (dimension A):														
BBP33	Fig. 20	142907	B33D-94-2-7642	B-7642	White	24 to 20	1.2	- 2.0	2.4	1.2	0.5 +/- 0.07	1	500	B30-R4300
BBP33	Fig. 20	142908	B33D-125-2-7642	B-7642	White	20 to 16	1.6	- 2.8	3.2	1.6	0.5 +/- 0.07	1	500	B30-R4300
BBP33	Fig. 20	142909	B33D-187-2-7642	B-7642	White	16 to 10	2.4	- 3.8	4.8	2.4	0.5 +/- 0.07	1	450	B30-R4300
BBP33	Fig. 20	142910	B33D-250-2-7642	B-7642	White	12 to 8	3.2	- 5.5	6.4	3.2	0.6 +/- 0.07	1	400	B30-R4300
BBP33	Fig. 20	142911	B33D-375-2-7642	B-7642	White	8 to 4	4.8	- 8.1	9.5	4.8	0.6 +/- 0.07	1	250	B30-R4300
BBP33	Fig. 20	142912	B33D-500-2-7642	B-7642	White	6 to 1	6.4	- 11.4	12.7	6.4	0.6 +/- 0.07	1	225	B30-R4300
BBP33	Fig. 20	142913	B33D-750-2-7642	B-7642	White	2 to 4/0	9.5	- 17.8	19.0	9.5	0.8 +/- 0.07	1	150	B30-R4300
BBP33	Fig. 20	142914	B33D-1000-2-7642	B-7642	White	2/0 to 0.950 dia	11.4	- 24.1	25.4	12.7	0.9 +/- 0.1	1	150	B30-R4300
BBP33	Fig. 20	142915	B33D-1500-2-7642	B-7642	White	N/A	19.0	- 35.6	38.1	19.1	1.0 +/- 0.2	1	50	B30-R4300
BBP33	Fig. 20	142916	B33D-2000-2-7642	B-7642	White	N/A	25.4	- 48.3	50.8	25.4	1.1 +/- 0.2	1	50	B30-R4300

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



PermaSleeve® FR Fluid Resistant Wire Marking Sleeves (B-344) Military/Industrial Grade. 3:1 Shrink ratio.

- Designed for labelling wires in applications where they will be exposed to fuels, lubricants and harsh chemicals
- Resistant to harsh chemicals including JP8 Jet Fuel, Skydrol® and DOT 3 brake fluid
- Meets the following industry specifications:
 - SAE-AMS-DTL-23053/6 (class 1)
 - MIL-STD-202G method 215K

Service temp: -70°C to 130°C
Agency Approvals for: **RoHS**





Figure 20

Fits Printer Model	Diagram	Part No.	Catalogue No.	B#	Colour	For Wire Gauge (approx.)	For Wire Diameters (mm)		Supplied Diameter B (mm)	Recovered Diameter (mm)	Recovered Wall Thickness (mm)	Sleeves Per Row	Sleeves Per Roll	Rec. Ribbon
3:1 Shrink ratio double-side printable, 50mm sleeve width (dimension A):														
BBP33	Fig. 20	* 118999	B33D-94-2-344	B-344	White	28 to 20	0.6	- 2.0	2.4	0.6	0.6 +/- 0.1	1	1000	B30-R6600
BBP33	Fig. 20	* 119010	B33D-125-2-344	B-344	White	22 to 16	1.2	- 2.8	3.1	1.2	0.5 +/- 0.1	1	1000	B30-R6600
BBP33	Fig. 20	* 119021	B33D-187-2-344	B-344	White	20 to 10	1.6	- 3.81	4.8	1.6	0.5 +/- 0.1	1	750	B30-R6600
BBP33	Fig. 20	* 119032	B33D-250-2-344	B-344	White	16 to 8	2.4	- 5.5	6.35	2.4	0.6 +/- 0.1	1	500	B30-R6600
BBP33	Fig. 20	* 119043	B33D-375-2-344	B-344	White	12 to 4	3.2	- 8.1	9.5	3.2	0.6 +/- 0.1	1	500	B30-R6600
BBP33	Fig. 20	* 119054	B33D-500-2-344	B-344	White	8 to 1	4.8	- 11.4	12.7	3.0	0.6 +/- 0.1	1	350	B30-R6600
BBP33	Fig. 20	* 119065	B33D-750-2-344	B-344	White	6 to 4/0	6.4	- 17.8	19.05	6.35	0.6 +/- 0.1	1	250	B30-R6600
BBP33	Fig. 20	* 139829	B33D-1000-2-344	B-344	White	2 to 0.950 dia	8.5	- 24.1	25.4	9.5	0.9 +/- 0.1	1	250	B30-R6600
BBP33	Fig. 20	* 119087	B33D-1500-2-344	B-344	White	n/a	12.7	- 35.6	38.1	12.7	0.9 +/- 0.1	1	150	B30-R6600
BBP33	Fig. 20	* 119000	B33D-94-2-344YL	B-344	Yellow	28 to 20	0.6	- 2.0	2.4	0.6	0.6 +/- 0.1	1	1000	B30-R6600
BBP33	Fig. 20	* 119011	B33D-125-2-344YL	B-344	Yellow	22 to 16	1.2	- 2.8	3.1	1.2	0.5 +/- 0.1	1	1000	B30-R6600
BBP33	Fig. 20	* 119022	B33D-187-2-344YL	B-344	Yellow	20 to 10	1.6	- 3.81	4.8	1.6	0.5 +/- 0.1	1	750	B30-R6600
BBP33	Fig. 20	* 119033	B33D-250-2-344YL	B-344	Yellow	16 to 8	2.4	- 5.5	6.35	2.4	0.6 +/- 0.1	1	500	B30-R6600
BBP33	Fig. 20	* 119044	B33D-375-2-344YL	B-344	Yellow	12 to 4	3.2	- 8.1	9.5	3.2	0.6 +/- 0.1	1	500	B30-R6600
BBP33	Fig. 20	* 119055	B33D-500-2-344YL	B-344	Yellow	8 to 1	4.8	- 11.4	12.7	3.0	0.6 +/- 0.1	1	350	B30-R6600
BBP33	Fig. 20	* 119066	B33D-750-2-344YL	B-344	Yellow	6 to 4/0	6.4	- 17.8	19.05	6.35	0.6 +/- 0.1	1	250	B30-R6600
BBP33	Fig. 20	* 119077	B33D-1000-2-344YL	B-344	Yellow	2 to 0.950 dia	8.5	- 24.1	25.4	9.5	0.9 +/- 0.1	1	250	B30-R6600
BBP33	Fig. 20	* 119088	B33D-1500-2-344YL	B-344	Yellow	n/a	12.7	- 35.6	38.1	12.7	0.9 +/- 0.1	1	150	B30-R6600
BBP33	Fig. 20	* 119005	B33D-94-2-344BK	B-344	Black	28 to 20	0.6	- 2.0	2.4	0.6	0.6 +/- 0.1	1	1000	B30-R6700-WT
BBP33	Fig. 20	* 119016	B33D-125-2-344BK	B-344	Black	22 to 16	1.2	- 2.8	3.1	1.2	0.5 +/- 0.1	1	1000	B30-R6700-WT
BBP33	Fig. 20	* 119027	B33D-187-2-344BK	B-344	Black	20 to 10	1.6	- 3.81	4.8	1.6	0.5 +/- 0.1	1	750	B30-R6700-WT
BBP33	Fig. 20	* 119038	B33D-250-2-344BK	B-344	Black	16 to 8	2.4	- 5.5	6.35	2.4	0.6 +/- 0.1	1	500	B30-R6700-WT
BBP33	Fig. 20	* 119049	B33D-375-2-344BK	B-344	Black	12 to 4	3.2	- 8.1	9.5	3.2	0.6 +/- 0.1	1	500	B30-R6700-WT
BBP33	Fig. 20	* 119060	B33D-500-2-344BK	B-344	Black	8 to 1	4.8	- 1.4	12.7	3.0	0.6 +/- 0.1	1	350	B30-R6700-WT
BBP33	Fig. 20	* 119071	B33D-750-2-344BK	B-344	Black	6 to 4/0	6.4	- 17.8	19.05	6.35	0.6 +/- 0.1	1	250	B30-R6700-WT
BBP33	Fig. 20	* 119082	B33D-1000-2-344BK	B-344	Black	2 to 0.950 dia	8.5	- 24.1	25.4	9.5	0.9 +/- 0.1	1	250	B30-R6700-WT
BBP33	Fig. 20	* 119093	B33D-1500-2-344BK	B-344	Black	n/a	12.7	- 35.6	38.1	12.7	0.9 +/- 0.1	1	150	B30-R6700-WT

* ⚠ Warning: Cancer www.P65Warnings.ca.gov

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.

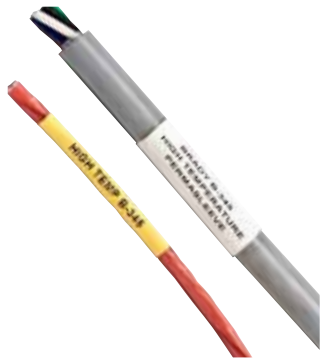

PermaSleeve® HT High Temp. PVDF Wire Marking Sleeves (B-345)

High temperature, low outgassing. 2:1 Shrink ratio.

- A 2:1 shrink ratio wire marker sleeve specifically designed for high temperature and low vacuum outgassing applications
- Fade-resistant and flame-retardant
- Meets the following industry specifications:
 - NASA SP-R-0022A Outgassing Performance
 - Tested per ASTM E162, ASTM E662, SAE-AMS-DTL-23053/18 (class 2)
 - MIL-STD-202 - SAE-AS-81531

Service temp: -55°C to 225°C Agency Approvals for HT and HX Sleeves: **RoHS**





Figure 20

Fits Printer Model	Diagram	Part No.	Catalogue No.	B#	Colour	For Wire Gauge (approx.)	For Wire Diameters (mm) Min. Max.	Supplied Diameter B (mm)	Recovered Diameter (mm)	Recovered Wall Thickness (mm)	Sleeves Per Row	Per Roll	Rec. Ribbon
3:1 Shrink ratio double-side printable, 50mm sleeve width (dimension A):													
BBP33	Fig. 20	142987	B33D-94-2-345	B-345	White	26 to 20	0.8 - 2.0	2.4	0.8	0.4 +/- 0.07	1	1000	B30-R6000
BBP33	Fig. 20	142986	B33D-94-2-345BK	B-345	Black	26 to 20	0.8 - 2.0	2.4	0.8	0.4 +/- 0.07	1	1000	B30-R4400-WT
2:1 Shrink ratio double-side printable, 50mm sleeve width (dimension A):													
BBP33	Fig. 20	142973	B33D-125-2-345	B-345	White	20 to 16	1.6 - 2.8	3.2	1.6	0.4 +/- 0.07	1	1000	B30-R6000
BBP33	Fig. 20	142977	B33D-187-2-345	B-345	White	16 to 10	2.4 - 3.8	4.7	2.4	0.4 +/- 0.07	1	750	B30-R6000
BBP33	Fig. 20	142979	B33D-250-2-345	B-345	White	12 to 8	3.2 - 5.5	6.4	3.2	0.4 +/- 0.07	1	500	B30-R6000
BBP33	Fig. 20	142981	B33D-375-2-345	B-345	White	8 to 4	3.2 - 8.1	9.5	4.7	0.4 +/- 0.07	1	500	B30-R6000
BBP33	Fig. 20	142983	B33D-500-2-345	B-345	White	6 to 1	6.4 - 11.4	12.7	6.4	0.4 +/- 0.07	1	350	B30-R6000
BBP33	Fig. 20	142985	B33D-750-2-345	B-345	White	2 to 4/0	9.5 - 17.8	19.0	9.5	0.4 +/- 0.07	1	250	B30-R6000
BBP33	Fig. 20	142971	B33D-1000-2-345	B-345	White	2/0 to 0.950 dia	11.4 - 24.1	25.4	12.7	0.4 +/- 0.1	1	250	B30-R6000
BBP33	Fig. 20	142975	B33D-1500-2-345	B-345	White	N/A	19.1 - 35.6	38.1	19.1	0.6 +/- 0.1	1	150	B30-R6000
BBP33	Fig. 20	142972	B33D-125-2-345BK	B-345	Black	20 to 16	1.6 - 2.8	3.2	1.6	0.4 +/- 0.07	1	1000	B30-R4400-WT
BBP33	Fig. 20	142976	B33D-187-2-345BK	B-345	Black	16 to 10	2.4 - 3.8	4.7	2.4	0.4 +/- 0.07	1	750	B30-R4400-WT
BBP33	Fig. 20	142978	B33D-250-2-345BK	B-345	Black	12 to 8	3.2 - 5.5	6.4	3.2	0.4 +/- 0.07	1	500	B30-R4400-WT
BBP33	Fig. 20	142980	B33D-375-2-345BK	B-345	Black	8 to 4	3.2 - 8.1	9.5	4.7	0.4 +/- 0.07	1	500	B30-R4400-WT
BBP33	Fig. 20	142982	B33D-500-2-345BK	B-345	Black	6 to 1	6.4 - 11.4	12.7	6.4	0.4 +/- 0.07	1	350	B30-R4400-WT
BBP33	Fig. 20	142984	B33D-750-2-345BK	B-345	Black	3 to 4/0	9.5 - 17.8	19.0	9.5	0.4 +/- 0.07	1	250	B30-R4400-WT
BBP33	Fig. 20	142970	B33D-1000-2-345BK	B-345	Black	2/0 to 0.950 dia	11.4 - 24.1	25.4	12.7	0.4 +/- 0.1	1	250	B30-R4400-WT
BBP33	Fig. 20	142974	B33D-1500-2-345BK	B-345	Black	N/A	19.1 - 35.6	38.1	19.1	0.6 +/- 0.1	1	150	B30-R4400-WT

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



PermaSleeve® PS Polyolefin Wire Marking Sleeves (B-342)

Standard Military/Industrial Grade. 3:1 Shrink ratio.

- A 3:1 heat shrinkable wire marker sleeve that fits snugly around wires
- Fade-resistant and flame-retardant
- Meets the following insulating and physical property specifications:
 - SAE-AMS-DTL-23053/5C (class 1)
 - SAE-AS-81531
 - MIL-STD-202
 - Tested per ASTM E162, ASTM E662

Service temp: -40°C to 130°C
 (short burst max temp: 5 min at 260°C, 24 hrs at 177°C)
 Agency approvals:  




Figure 20





Figure 20-2


Fits Printer Model	Diagram	Part No.	Catalogue No.	B#	Colour	For Wire Gauge (approx.)	For Wire Diameters (mm) Min. Max.	Supplied Diameter B (mm)	Recovered Diameter (mm)	Recovered Wall Thickness (mm)	Sleeves Per Row Per Roll	Rec. Ribbon
3:1 Shrink ratio single-side printable, 50mm sleeve width (dimension A):												
BBP33	Fig. 20	* 142926	B33-94-2-342	B-342	White	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	1	1000 B30-R4300
BBP33	Fig. 20	* 143034	B33-125-2-342	B-342	White	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	1	1000 B30-R4300
BBP33	Fig. 20	* 143036	B33-187-2-342	B-342	White	20 to 10	1.6 - 3.8	4.7	1.6	0.5 +/- 0.07	1	750 B30-R4300
BBP33	Fig. 20	* 143038	B33-250-2-342	B-342	White	16 to 8	2.4 - 5.5	6.4	2.4	0.6 +/- 0.07	1	500 B30-R4300
BBP33	Fig. 20	* 143039	B33-375-2-342	B-342	White	12 to 4	3.2 - 8.1	9.5	3.1	0.6 +/- 0.07	1	500 B30-R4300
BBP33	Fig. 20	* 143040	B33-500-2-342	B-342	White	8 to 1	4.8 - 11.4	12.7	4.7	0.6 +/- 0.07	1	350 B30-R4300
BBP33	Fig. 20	* 143041	B33-750-2-342	B-342	White	6 to 4/0	6.4 - 17.8	19.0	6.4	0.6 +/- 0.07	1	250 B30-R4300
BBP33	Fig. 20	* 143032	B33-1000-2-342	B-342	White	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	1	250 B30-R4300
BBP33	Fig. 20	* 142992	B33-1500-2-342	B-342	White	n/a	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	1	150 B30-R4300
BBP33	Fig. 20	* 142932	B33-94-2-342YL	B-342	Yellow	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	1	1000 B30-R4300
BBP33	Fig. 20	* 143035	B33-125-2-342YL	B-342	Yellow	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	1	1000 B30-R4300
BBP33	Fig. 20	* 143037	B33-187-2-342YL	B-342	Yellow	20 to 10	1.6 - 3.8	4.7	1.6	0.5 +/- 0.07	1	750 B30-R4300
BBP33	Fig. 20	* 142930	B33-250-2-342YL	B-342	Yellow	16 to 8	2.4 - 5.5	6.4	2.4	0.6 +/- 0.07	1	500 B30-R4300
BBP33	Fig. 20	* 142931	B33-375-2-342YL	B-342	Yellow	12 to 4	3.2 - 8.1	9.5	3.1	0.6 +/- 0.07	1	500 B30-R4300
BBP33	Fig. 20	* 142927	B33-500-2-342YL	B-342	Yellow	8 to 1	4.8 - 11.4	12.7	4.7	0.6 +/- 0.07	1	350 B30-R4300
BBP33	Fig. 20	* 142934	B33-750-2-342YL	B-342	Yellow	6 to 4/0	6.4 - 17.8	19.0	6.4	0.6 +/- 0.07	1	250 B30-R4300
BBP33	Fig. 20	* 143033	B33-1000-2-342YL	B-342	Yellow	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	1	250 B30-R4300
BBP33	Fig. 20	* 142993	B33-1500-2-342YL	B-342	Yellow	n/a	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	1	150 B30-R4300
BBP33	Fig. 20	* 142991	B33-1500-2-342BK	B-342	Black	n/a	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	1	150 B30-R4500-SV
3:1 Shrink ratio single-side printable, 25mm sleeve width in "2-up pre-cut" configuration (dimension A):												
BBP33	Fig. 20-2	* 133978	B33-94-2-342-2	B-342	White	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	2	2000 B30-R4300
BBP33	Fig. 20-2	* 133784	B33-125-2-342-2	B-342	White	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	2	2000 B30-R4300
BBP33	Fig. 20-2	* 142944	B33-187-2-342-2	B-342	White	20 to 10	1.6 - 3.8	4.7	1.6	0.5 +/- 0.07	2	1500 B30-R4300
BBP33	Fig. 20-2	* 142945	B33-250-2-342-2	B-342	White	16 to 8	2.4 - 5.5	6.4	2.4	0.6 +/- 0.07	2	1000 B30-R4300
BBP33	Fig. 20-2	* 142946	B33-375-2-342-2	B-342	White	12 to 4	3.2 - 8.1	9.5	3.1	0.6 +/- 0.07	2	1000 B30-R4300
BBP33	Fig. 20-2	* 133879	B33-500-2-342-2	B-342	White	8 to 1	4.8 - 11.4	12.7	3.0	0.6 +/- 0.07	2	700 B30-R4300
BBP33	Fig. 20-2	* 141658	B33-750-2-342-2	B-342	White	6 to 4/0	6.4 - 17.8	19.1	6.35	0.6 +/- 0.07	2	500 B30-R4300
BBP33	Fig. 20-2	* 133766	B33-1000-2-342-2	B-342	White	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	2	500 B30-R4300
BBP33	Fig. 20-2	* 133808	B33-1500-2-342-2	B-342	White	n/a	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	2	150 B30-R4300
BBP33	Fig. 20-2	* 133979	B33-94-2-342YL-2	B-342	Yellow	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	2	2000 B30-R4300
BBP33	Fig. 20-2	* 133785	B33-125-2-342YL-2	B-342	Yellow	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	2	2000 B30-R4300
BBP33	Fig. 20-2	* 145570	B33-750-2-342YL-2	B-342	Yellow	6 to 4/0	6.4 - 17.8	19.1	6.35	0.6 +/- 0.07	2	500 B30-R4300
BBP33	Fig. 20-2	* 133880	B33-500-2-342YL-2	B-342	Yellow	8 to 1	4.8 - 11.4	12.7	3.0	0.6 +/- 0.07	2	700 B30-R4300
BBP33	Fig. 20-2	* 133767	B33-1000-2-342YL-2	B-342	Yellow	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	2	500 B30-R4300
BBP33	Fig. 20-2	* 133809	B33-1500-2-342YL-2	B-342	Yellow	n/a	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	2	300 B30-R4300

*  **Warning:** Cancer www.P65Warnings.ca.gov

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.

PermaSleeve® PS Polyolefin Wire Marking Sleeves (Continued)

Fits Printer Model	Diagram	Part No.	Catalogue No.	B#	Colour	For Wire Gauge (approx.)	For Wire Diameters (mm) Min. Max.	Supplied Diameter B (mm)	Recovered Diameter (mm)	Recovered Wall Thickness (mm)	Sleeves Per Row Per Roll	Rec. Ribbon
3:1 Shrink ratio double-side printable, 50mm sleeve width (dimension A):												
BBP33	Fig. 20	* 143019	B33D-94-2-342	B-342	White	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	1	1000 B30-R4300
BBP33	Fig. 20	* 143021	B33D-125-2-342	B-342	White	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	1	1000 B30-R4300
BBP33	Fig. 20	* 140882	B33D-125-2-342-2	B-342	White	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	2	2000 B30-R4300
BBP33	Fig. 20	* 143023	B33D-187-2-342	B-342	White	20 to 10	1.6 - 3.8	4.7	1.6	0.5 +/- 0.07	1	750 B30-R4300
BBP33	Fig. 20	* 143025	B33D-250-2-342	B-342	White	16 to 8	2.4 - 5.5	6.4	2.4	0.6 +/- 0.07	1	500 B30-R4300
BBP33	Fig. 20	* 143027	B33D-375-2-342	B-342	White	12 to 4	3.2 - 8.1	9.5	3.1	0.6 +/- 0.07	1	500 B30-R4300
BBP33	Fig. 20	* 143029	B33D-500-2-342	B-342	White	8 to 1	4.8 - 11.4	12.7	4.7	0.6 +/- 0.07	1	350 B30-R4300
BBP33	Fig. 20	* 143031	B33D-750-2-342	B-342	White	6 to 4/0	6.4 - 17.8	19.0	6.4	0.6 +/- 0.07	1	250 B30-R4300
BBP33	Fig. 20	* 142937	B33D-1000-2-342	B-342	White	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	1	250 B30-R4300
BBP33	Fig. 20	* 142989	B33D-1500-2-342	B-342	White	n/a	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	1	150 B30-R4300
BBP33	Fig. 20	* 143020	B33D-94-2-342YL	B-342	Yellow	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	1	1000 B30-R4300
BBP33	Fig. 20	* 143022	B33D-125-2-342YL	B-342	Yellow	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	1	1000 B30-R4300
BBP33	Fig. 20	* 143024	B33D-187-2-342YL	B-342	Yellow	20 to 10	1.6 - 3.8	4.7	1.6	0.5 +/- 0.07	1	750 B30-R4300
BBP33	Fig. 20	* 143026	B33D-250-2-342YL	B-342	Yellow	16 to 8	2.4 - 5.5	6.4	2.4	0.6 +/- 0.07	1	500 B30-R4300
BBP33	Fig. 20	* 143028	B33D-375-2-342YL	B-342	Yellow	12 to 4	3.2 - 8.1	9.5	3.1	0.6 +/- 0.07	1	500 B30-R4300
BBP33	Fig. 20	* 143030	B33D-500-2-342YL	B-342	Yellow	8 to 1	4.8 - 11.4	12.7	4.7	0.6 +/- 0.07	1	350 B30-R4300
BBP33	Fig. 20	* 142928	B33D-750-2-342YL	B-342	Yellow	6 to 4/0	6.4 - 17.8	19.0	6.4	0.6 +/- 0.07	1	250 B30-R4300
BBP33	Fig. 20	* 142933	B33D-1000-2-342YL	B-342	Yellow	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	1	250 B30-R4300
BBP33	Fig. 20	* 142990	B33D-1500-2-342YL	B-342	Yellow	n/a	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	1	150 B30-R4300
BBP33	Fig. 20	* 142935	B33D-94-2-342BK	B-342	Black	28 to 20	0.6 - 2.0	2.4	0.6	0.6 +/- 0.07	1	1000 B30-R4500-SV
BBP33	Fig. 20	* 142921	B33D-125-2-342BK	B-342	Black	22 to 16	1.2 - 2.8	3.2	1.2	0.5 +/- 0.07	1	1000 B30-R4500-SV
BBP33	Fig. 20	* 142923	B33D-187-2-342BK	B-342	Black	20 to 10	1.6 - 3.8	4.7	1.6	0.5 +/- 0.07	1	750 B30-R4500-SV
BBP33	Fig. 20	* 142924	B33D-250-2-342BK	B-342	Black	16 to 8	2.4 - 5.5	6.4	2.4	0.6 +/- 0.07	1	500 B30-R4500-SV
BBP33	Fig. 20	* 142922	B33D-375-2-342BK	B-342	Black	12 to 4	3.2 - 8.1	9.5	3.1	0.6 +/- 0.07	1	500 B30-R4500-SV
BBP33	Fig. 20	* 142925	B33D-500-2-342BK	B-342	Black	8 to 1	4.8 - 11.4	12.7	4.7	0.6 +/- 0.07	1	350 B30-R4500-SV
BBP33	Fig. 20	* 142929	B33D-750-2-342BK	B-342	Black	6 to 4/0	6.4 - 17.8	19.0	6.4	0.6 +/- 0.07	1	250 B30-R4500-SV
BBP33	Fig. 20	* 142869	B33D-1000-2-342BK	B-342	Black	2 to 0.950 dia	8.5 - 24.1	25.4	9.5	0.9 +/- 0.07	1	250 B30-R4500-SV
BBP33	Fig. 20	* 142988	B33D-1500-2-342BK	B-342	Black	n/a	12.7 - 35.6	38.1	12.7	0.9 +/- 0.07	1	150 B30-R4500-SV

*  **Warning:** Cancer www.P65Warnings.ca.gov



Rectangular Style Raised Profile Labels/ Engraved Plate Substitutes Labels (B-593)

- High-gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70mm thick)
- High-performance, low-cost substitute for engraved plates
- 10-year outdoor durability rating
- Print out in approximately 4 seconds

Service temp: -20°C to 100°C
 Application temp: 10°C to 100°C
 Average outdoor durability: up to 10 years
 Agency approvals:




Figure 18c



Diagram	Part No.	Catalogue No.	B#	Colour	Label Height A (mm)	Label Width B (mm)	Vert. Repeat D (mm)	Web Width E (mm)	Labels Per Roll	Rec. Ribbon
Fig. 18c	118015	B30EP-171-593-WT	B-593	White	12.5	26.9	19.1	34.9	500	B30-R6000
Fig. 18c	118021	B30EP-172-593-WT	B-593	White	15.0	45.0	21.6	63.5	450	B30-R6000
Fig. 18c	118039	B30EP-175-593-WT	B-593	White	19.1	76.2	25.4	82.6	375	B30-R6000
Fig. 18c	118027	B30EP-173-593-WT	B-593	White	25.4	50.8	31.8	63.5	300	B30-R6000
Fig. 18c	118033	B30EP-174-593-WT	B-593	White	25.4	101.6	31.8	108.0	300	B30-R6000
Fig. 18c	118043	B30EP-176-593-WT	B-593	White	25.4	76.2	31.8	82.6	300	B30-R6000
Fig. 18c	118047	B30EP-177-593-WT	B-593	White	63.5	76.2	69.9	82.6	125	B30-R6000
Fig. 18c	118017	B30EP-171-593-YL	B-593	Yellow	12.5	26.9	19.1	34.9	500	B30-R6000
Fig. 18c	118023	B30EP-172-593-YL	B-593	Yellow	15.0	45.0	21.6	63.5	450	B30-R6000
Fig. 18c	118040	B30EP-175-593-YL	B-593	Yellow	19.1	76.2	25.4	82.6	375	B30-R6000
Fig. 18c	118029	B30EP-173-593-YL	B-593	Yellow	25.4	50.8	31.8	63.5	300	B30-R6000
Fig. 18c	118035	B30EP-174-593-YL	B-593	Yellow	25.4	101.6	31.8	108.0	300	B30-R6000
Fig. 18c	118044	B30EP-176-593-YL	B-593	Yellow	25.4	76.2	31.8	82.6	300	B30-R6000
Fig. 18c	118048	B30EP-177-593-YL	B-593	Yellow	63.5	76.2	69.9	82.6	125	B30-R6000
Fig. 18c	118020	B30EP-171-593-BK	B-593	Black	12.5	26.9	19.1	34.9	500	B30-R4400-WT
Fig. 18c	118026	B30EP-172-593-BK	B-593	Black	15.0	45.0	21.6	63.5	450	B30-R4400-WT
Fig. 18c	118042	B30EP-175-593-BK	B-593	Black	19.1	76.2	25.4	82.6	375	B30-R4400-WT
Fig. 18c	118032	B30EP-173-593-BK	B-593	Black	25.4	50.8	31.8	63.5	300	B30-R4400-WT
Fig. 18c	118038	B30EP-174-593-BK	B-593	Black	25.4	101.6	31.8	108.0	300	B30-R4400-WT
Fig. 18c	118046	B30EP-176-593-BK	B-593	Black	25.4	76.2	31.8	82.6	300	B30-R4400-WT
Fig. 18c	118050	B30EP-177-593-BK	B-593	Black	63.5	76.2	69.9	82.6	125	B30-R4400-WT
Fig. 18c	118018	B30EP-171-593-GN	B-593	Green	12.5	26.9	19.1	34.9	500	B30-R4400-WT
Fig. 18c	118024	B30EP-172-593-GN	B-593	Green	15.0	45.0	21.6	63.5	450	B30-R4400-WT
Fig. 18c	118041	B30EP-175-593-GN	B-593	Green	19.1	76.2	25.4	82.6	375	B30-R4400-WT
Fig. 18c	118030	B30EP-173-593-GN	B-593	Green	25.4	50.8	31.8	63.5	300	B30-R4400-WT
Fig. 18c	118036	B30EP-174-593-GN	B-593	Green	25.4	101.6	31.8	108.0	300	B30-R4400-WT
Fig. 18c	118045	B30EP-176-593-GN	B-593	Green	25.4	76.2	31.8	82.6	300	B30-R4400-WT
Fig. 18c	118049	B30EP-177-593-GN	B-593	Green	63.5	76.2	69.9	82.6	125	B30-R4400-WT
Fig. 18c	118016	B30EP-171-593-RD	B-593	Red	12.5	26.9	19.1	34.9	500	B30-R4400-WT
Fig. 18c	118022	B30EP-172-593-RD	B-593	Red	15.0	45.0	21.6	63.5	450	B30-R4400-WT
Fig. 18c	118028	B30EP-173-593-RD	B-593	Red	25.4	50.8	31.8	63.5	300	B30-R4400-WT
Fig. 18c	118034	B30EP-174-593-RD	B-593	Red	25.4	101.6	31.8	108.0	300	B30-R4400-WT
Fig. 18c	118019	B30EP-171-593-SL	B-593	Silver	12.5	26.9	19.1	34.9	500	B30-R6000
Fig. 18c	118025	B30EP-172-593-SL	B-593	Silver	15.0	45.0	21.6	63.5	450	B30-R6000
Fig. 18c	118031	B30EP-173-593-SL	B-593	Silver	25.4	50.8	31.8	63.5	300	B30-R6000
Fig. 18c	118037	B30EP-174-593-SL	B-593	Silver	25.4	101.6	31.8	108.0	300	B30-R6000

U.S. Patent Nos. US8475914B2; US9005729B2.



Push Button Style Raised Profile Labels/ Engraved Plate Substitutes Labels (B-593)

- High-gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70mm thick)
- 10-year outdoor durability rating
- 5 push button sizes (including keyed and non-keyed 22.5mm and 30.5mm hole diameter keyed)

Service temp: -20°C to 100°C
 Application temp: 10°C to 100°C
 Average outdoor durability: up to 10 years
 Agency approvals:




Figure 18b
(Without key hole)




Figure 18a

Diagram	Part No.	Catalogue No.	B#	Colour	Label Height A (mm)	Label Width B (mm)	Hole Diameter C (mm)	Vert. Repeat D (mm)	Web Width E (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 18a	118051	B30EP-167-593-WT	B-593	White	38.1	30.5	22.5	44.5	63.5	1	200	B30-R6000
Fig. 18b	118056	B30EP-167U-593-WT	B-593	White	38.1	30.5	22.5	44.5	63.5	1	200	B30-R6000
Fig. 18a	118066	B30EP-169-593-WT	B-593	White	45.7	45.7	30.5	50.8	63.5	1	190	B30-R6000
Fig. 18a	118061	B30EP-168-593-WT	B-593	White	48.3	30.5	22.5	54.0	63.5	1	180	B30-R6000
Fig. 18a	118071	B30EP-170-593-WT	B-593	White	60.9	60.9	30.5	66.7	82.6	1	145	B30-R6000
Fig. 18a	118053	B30EP-167-593-YL	B-593	Yellow	38.1	30.5	22.5	44.5	63.5	1	200	B30-R6000
Fig. 18b	118058	B30EP-167U-593-YL	B-593	Yellow	38.1	30.5	22.5	44.5	63.5	1	200	B30-R6000
Fig. 18a	118068	B30EP-169-593-YL	B-593	Yellow	45.7	45.7	30.5	50.8	63.5	1	190	B30-R6000
Fig. 18a	118063	B30EP-168-593-YL	B-593	Yellow	48.3	30.5	22.5	54.0	63.5	1	180	B30-R6000
Fig. 18a	118073	B30EP-170-593-YL	B-593	Yellow	60.9	60.9	30.5	66.7	82.6	1	145	B30-R6000
Fig. 18a	118055	B30EP-167-593-BK	B-593	Black	38.1	30.5	22.5	44.5	63.5	1	200	B30-R4400-WT
Fig. 18b	118060	B30EP-167U-593-BK	B-593	Black	38.1	30.5	22.5	44.5	63.5	1	200	B30-R4400-WT
Fig. 18a	118070	B30EP-169-593-BK	B-593	Black	45.7	45.7	30.5	50.8	63.5	1	190	B30-R4400-WT
Fig. 18a	118065	B30EP-168-593-BK	B-593	Black	48.3	30.5	22.5	54.0	63.5	1	180	B30-R4400-WT
Fig. 18a	118075	B30EP-170-593-BK	B-593	Black	60.9	60.9	30.5	66.7	82.6	1	145	B30-R4400-WT
Fig. 18a	118054	B30EP-167-593-GN	B-593	Green	38.1	30.5	22.5	44.5	63.5	1	200	B30-R4400-WT
Fig. 18b	118059	B30EP-167U-593-GN	B-593	Green	38.1	30.5	22.5	44.5	63.5	1	200	B30-R4400-WT
Fig. 18a	118069	B30EP-169-593-GN	B-593	Green	45.7	45.7	30.5	50.8	63.5	1	190	B30-R4400-WT
Fig. 18a	118064	B30EP-168-593-GN	B-593	Green	48.3	30.5	22.5	54.0	63.5	1	180	B30-R4400-WT
Fig. 18a	118074	B30EP-170-593-GN	B-593	Green	60.9	60.9	30.5	66.7	82.6	1	145	B30-R4400-WT
Fig. 18a	118074	B30EP-167-593-RD	B-593	Red	38.1	30.5	22.5	44.5	63.5	1	200	B30-R4400-WT
Fig. 18b	118057	B30EP-167U-593-RD	B-593	Red	38.1	30.5	22.5	44.5	63.5	1	200	B30-R4400-WT
Fig. 18a	118067	B30EP-169-593-RD	B-593	Red	45.7	45.7	30.5	50.8	63.5	1	190	B30-R4400-WT
Fig. 18a	118062	B30EP-168-593-RD	B-593	Red	48.3	30.5	22.5	54.0	63.5	1	180	B30-R4400-WT
Fig. 18a	118072	B30EP-170-593-RD	B-593	Red	60.9	60.9	30.5	66.7	82.6	1	145	B30-R4400-WT

U.S. Patent Nos. US8475914B2; US9005729B2.



Polyester Labels (B-422, B-423, B-430, B-432, B483, B-484, B-489)

- For general purpose industrial ID applications, bin and shelf labelling in production areas, and PC board component ID

B-423, B-483, B-489: Service temp: -70°C to 120°C
Agency approvals:

B-430, B-432: Service temp: -40°C to 100°C
Agency approvals:

B-484: Service temp: -40°C to 115°C
Agency approvals:




Figure 1




Figure 2

Fits Printer Model(s)	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Label Height B (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive (B-423 gloss white):										
BBP33	Fig. 4	133774	B33-11-423	B-423	Gloss White	6.4	6.4	12	15000	B30-R6000
BBP33	Fig. 1	133858	B33-38-423	B-423	Gloss White	9.5	9.5	9	5000	B30-R6000
BBP33	Fig. 1	133801	B33-149-423	B-423	Gloss White	12.7	12.7	4	5000	B30-R6000
BBP33	Fig. 1	133788	B33-1-423	B-423	Gloss White	19.1	6.4	4	5000	B30-R6000
BBP33	Fig. 2	133871	B33-46-423	B-423	Gloss White	19.1	6.4	1	5000	B30-R6000
BBP33	Fig. 2	133877	B33-49-423	B-423	Gloss White	22.9	6.4	1	5000	B30-R6000
BBP33	Fig. 2	133769	B33-103-423	B-423	Gloss White	25.4	6.4	1	5000	B30-R6000
BBP33	Fig. 1	133852	B33-3-423	B-423	Gloss White	25.4	9.5	3	5000	B30-R6000
BBP33	Fig. 1	143076	B33-5-423	B-423	Gloss White	25.4	12.7	3	5000	B30-R6000
BBP33	Fig. 2	133864	B33-43-423	B-423	Gloss White	31.8	6.4	1	5000	B30-R6000
BBP33	Fig. 1	133845	B33-29-423	B-423	Gloss White	31.8	9.5	2	5000	B30-R6000
BBP33	Fig. 2	133868	B33-45-423	B-423	Gloss White	38.1	6.4	1	5000	B30-R6000
BBP33	Fig. 2	133961	B33-72-423	B-423	Gloss White	44.5	6.4	1	5000	B30-R6000
BBP33	Fig. 2	133882	B33-53-423	B-423	Gloss White	50.8	12.7	1	2500	B30-R6000
BBP33	Fig. 2	143087	B33-17-423	B-423	Gloss White	50.8	25.4	1	1500	B30-R6000
BBP33	Fig. 2	143081	B33-18-423	B-423	Gloss White	76.2	25.4	1	1500	B30-R6000
BBP33	Fig. 2	133827	B33-19-423	B-423	Gloss White	76.2	50.8	1	500	B30-R6000
BBP33	Fig. 2	133893	B33-55-423	B-423	Gloss White	101.6	50.8	1	750	B30-R6000
Standard adhesive (B-430 clear):										
BBP33	Fig. 1	133887	B33-5-430	B-430	Clear	25.4	12.7	3	5000	B30-R6000
BBP33	Fig. 2	142885	B33-17-430	B-430	Clear	50.8	25.4	1	1500	B30-R6000
BBP33	Fig. 2	142886	B33-18-430	B-430	Clear	76.2	25.4	1	1500	B30-R6000
Stronger adhesive for textured surfaces (B-422 gloss white):										
BBP33	Fig. 1	133800	B33-149-422	B-422	White	12.7	12.7	4	5000	B30-R6000
BBP33	Fig. 1	133886	B33-5-422	B-422	White	25.4	12.7	3	5000	B30-R6000
BBP33	Fig. 1	133797	B33-147-422	B-422	White	38.1	9.5	2	2500	B30-R6000
BBP33	Fig. 2	133768	B33-102-422	B-422	White	38.1	9.5	1	2500	B30-R6000
BBP33	Fig. 2	133957	B33-136-422	B-422	White	38.1	19.0	1	1500	B30-R6000
BBP33	Fig. 2	133815	B33-17-422	B-422	White	50.8	25.4	1	1500	B30-R6000
BBP33	Fig. 2	133822	B33-18-422	B-422	White	76.2	25.4	1	1500	B30-R6000
BBP33	Fig. 2	133826	B33-19-422	B-422	White	76.2	50.8	1	500	B30-R6000
BBP33	Fig. 2	133973	B33-76-422	B-422	White	101.6	76.2	1	500	B30-R6000
Stronger adhesive for textured surfaces (B-432 clear):										
BBP33	Fig. 1	133803	B33-149-432	B-432	Clear	12.7	12.7	4	5000	B30-R6000
BBP33	Fig. 1	122072	B33-5-432	B-432	Clear	25.4	12.7	3	5000	B30-R6000
BBP33	Fig. 2	143003	B33-17-432	B-432	Clear	50.8	25.4	1	1500	B30-R6000
BBP33	Fig. 2	143004	B33-18-432	B-432	Clear	76.2	25.4	1	1500	B30-R6000
BBP33	Fig. 2	143054	B33-19-432	B-432	Clear	76.2	50.8	1	500	B30-R6000
Ultra aggressive adhesive for highly textured surfaces (B-483 gloss white):										
BBP33	Fig. 1	133806	B33-149-483	B-483	Gloss White	12.7	12.7	4	5000	B30-R6000
BBP33	Fig. 1	143075	B33-5-483	B-483	Gloss White	25.4	12.7	3	5000	B30-R6000
BBP33	Fig. 2	143084	B33-17-483	B-483	Gloss White	50.8	25.4	1	1500	B30-R6000
BBP33	Fig. 2	133965	B33-7-483	B-483	Gloss White	69.9	31.8	1	1000	B30-R6000
BBP33	Fig. 2	143079	B33-18-483	B-483	Gloss White	76.2	25.4	1	1500	B30-R6000
BBP33	Fig. 2	142956	B33-19-483	B-483	Gloss White	76.2	50.8	1	500	B30-R6000
BBP33	Fig. 2	133897	B33-55-483	B-483	Gloss White	101.6	50.8	1	750	B30-R6000
Ultra aggressive adhesive for highly textured surfaces (B-489 matte white):										
BBP33	Fig. 1	143062	B33-5-489	B-489	Matte White	25.4	12.7	3	5000	B30-R4300
BBP33	Fig. 2	142969	B33-17-489	B-489	Matte White	50.8	25.4	1	1500	B30-R4300
BBP33	Fig. 2	143052	B33-18-489	B-489	Matte White	76.2	25.4	1	1500	B30-R4300
BBP33	Fig. 2	142958	B33-19-489	B-489	Matte White	76.2	50.8	1	500	B30-R4300
Polyester - Ultra-aggressive adhesive and pliable for conforming to angular surfaces (B-484):										
BBP33	Fig. 2	133786	B33-125-484	B-484	White	22.9	12.7	1	1500	B30-R6000
BBP33	Fig. 1	133892	B33-5-484	B-484	White	25.4	12.7	3	5000	B30-R6000
BBP33	Fig. 2	133787	B33-136-484	B-484	White	38.1	19.1	1	1500	B30-R6000
BBP33	Fig. 2	133816	B33-17-484	B-484	White	50.8	25.4	1	1500	B30-R6000
BBP33	Fig. 2	133824	B33-18-484	B-484	White	76.2	25.4	1	1500	B30-R6000
BBP33	Fig. 2	133830	B33-19-484	B-484	White	76.2	50.8	1	500	B30-R6000

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



Metallised Polyester Labels (B-428, B-434, B-438, B-486, B-565)

- For product labelling, asset tracking and general industrial ID
- Ideal for serial number plates and rating plates with name-plate quality and metal-looking finish




B-428: Service temp: -40°C to 145°C Agency approvals:

B-434: Service temp: -40°C to 90°C Agency approvals:

B-438: Service temp: -40°C to 40°C Agency approvals:

B-486: Service temp: -40°C to 120°C Agency approvals:

B-565: Service temp: -40°C to 115°C Agency approvals:



Fits Printer Model(s)	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Label Height B (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard adhesive for smooth surfaces (B-428 matte):										
BBP33	Fig. 1	142880	B33-5-428	B-428	Matte Silver	25.4	12.7	3	5000	B30-R4300
BBP33	Fig. 2	133884	B33-53-428	B-428	Matte Silver	50.8	12.7	1	2500	B30-R4300
BBP33	Fig. 2	143085	B33-17-428	B-428	Matte Silver	50.8	25.4	1	1500	B30-R4300
BBP33	Fig. 2	142881	B33-18-428	B-428	Matte Silver	76.2	25.4	1	1500	B30-R4300
BBP33	Fig. 2	133828	B33-19-428	B-428	Matte Silver	76.2	50.8	1	500	B30-R4300
BBP33	Fig. 3	133996	B33C-3000-428	B-428	Matte Silver	76.2	25.9mm		1 roll (cont.)	B30-R4300
Standard adhesive for smooth surfaces (B-565 matte):										
All	Fig. 3	117922	B30C-1125-565-SL	B-565	Matte Silver	28.6	30.5mm		1 roll (cont.)	B30-R4300
All	Fig. 3	117921	B30C-2250-565-SL	B-565	Matte Silver	57.5	30.5mm		1 roll (cont.)	B30-R4300
All	Fig. 3	117920	B30C-4000-565-SL	B-565	Matte Silver	101.6	30.5mm		1 roll (cont.)	B30-R4300
Standard adhesive for smooth surfaces (B-435 glossy):										
BBP33	Fig. 2	133823	B33-18-435	B-435	Gloss Silver	76.2	25.4	1	1500	B30-R6000
BBP33	Fig. 2	133829	B33-19-435	B-435	Gloss Silver	76.2	50.8	1	500	B30-R6000
BBP33	Fig. 2	133896	B33-55-435	B-435	Gloss Silver	101.6	50.8	1	750	B30-R6000
Stronger adhesive for rougher surfaces (B-434 glossy):										
BBP33	Fig. 1	142963	B33-5-434	B-434	Gloss Silver	25.4	12.7	3	5000	B30-R6000
BBP33	Fig. 2	133958	B33-136-434	B-434	Gloss Silver	38.1	19.1	1	1500	B30-R6000
BBP33	Fig. 2	142968	B33-17-434	B-434	Gloss Silver	50.8	25.4	1	1500	B30-R6000
BBP33	Fig. 2	142954	B33-18-434	B-434	Gloss Silver	76.2	25.4	1	1500	B30-R6000
BBP33	Fig. 2	142955	B33-19-434	B-434	Gloss Silver	76.2	50.8	1	500	B30-R6000
BBP33	Fig. 2	133895	B33-55-434	B-434	Gloss Silver	101.6	50.8	1	750	B30-R6000
Ultra aggressive adhesive for highly textured, powder coated and low surface energy surfaces (B-486 matte):										
BBP33	Fig. 2	133954	B33-59-486	B-486	Matte Silver	25.4	12.7	1	2500	B30-R4300
BBP33	Fig. 1	142879	B33-5-486	B-486	Matte Silver	25.4	12.7	3	5000	B30-R4300
BBP33	Fig. 2	133885	B33-53-486	B-486	Matte Silver	50.8	12.7	1	2500	B30-R4300
BBP33	Fig. 2	143083	B33-17-486	B-486	Matte Silver	50.8	25.4	1	1300	B30-R4300
BBP33	Fig. 2	133966	B33-7-486	B-486	Matte Silver	69.9	31.8	1	1000	B30-R4300
BBP33	Fig. 2	143078	B33-18-486	B-486	Matte Silver	76.2	25.4	1	1300	B30-R4300
BBP33	Fig. 2	142957	B33-19-486	B-486	Matte Silver	76.2	50.8	1	500	B30-R4300
BBP33	Fig. 2	133975	B33-76-486	B-486	Matte Silver	101.6	76.2	1	500	B30-R4300
BBP33	Fig. 2	133812	B33-161-486	B-486	Matte Silver	101.6	101.6	1	250	B30-R4300

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.




Standard Polyimide Labels (B-724, B-727)

- Top or bottom-side component ID or board ID labels that withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards

B-727: Service temp: -70°C to 100°C (short burst max temp: 80 sec at 300°C, 5 min at 260°C, 2 hrs at 170°C)
Agency approvals:

B-724: Service temp: -70°C to 270°C (short burst max temp: 80 sec at 330°C, 5 min at 280°C)
Agency approvals:

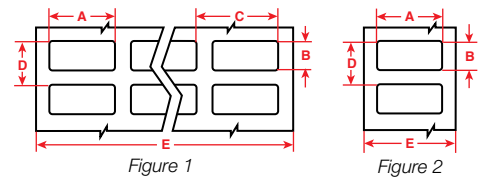


Fits Printer Model(s)	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Label Height B (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard temperature (B-727 gloss white):										
BBP33	Fig. 1	140725	B33-11-727	B-727	Gloss White	6.35	6.4	12	5000	B30-R6000
BBP33	Fig. 1	133860	B33-38-727	B-727	Gloss White	9.5	9.5	9	5000	B30-R6000
BBP33	Fig. 1	133804	B33-149-727	B-727	Gloss White	12.7	12.7	4	5000	B30-R6000
BBP33	Fig. 1	140727	B33-1-727	B-727	Gloss White	19.1	6.4	4	5000	B30-R6000
BBP33	Fig. 2	140729	B33-49-727	B-727	Gloss White	22.9	6.4	1	5000	B30-R6000
BBP33	Fig. 1	133834	B33-2-727	B-727	Gloss White	22.9	6.4	3	5000	B30-R6000
BBP33	Fig. 2	140730	B33-103-727	B-727	Gloss White	25.4	6.4	1	5000	B30-R6000
BBP33	Fig. 2	140731	B33-58-727	B-727	Gloss White	25.4	9.5	1	4000	B30-R6000
BBP33	Fig. 2	140732	B33-59-727	B-727	Gloss White	25.4	12.7	1	2500	B30-R6000
BBP33	Fig. 2	140733	B33-43-727	B-727	Gloss White	31.8	6.4	1	5000	B30-R6000
BBP33	Fig. 2	140734	B33-44-727	B-727	Gloss White	34.9	6.4	1	5000	B30-R6000
BBP33	Fig. 2	140735	B33-45-727	B-727	Gloss White	38.1	6.4	1	5000	B30-R6000
BBP33	Fig. 2	133962	B33-72-727	B-727	Gloss White	44.5	6.4	1	5000	B30-R6000
Extremely high temperature (B-724 matte amber):										
BBP33	Fig. 1	133802	B33-149-724	B-724	Matte Amber	12.7	12.7	4	5000	B30-R4300
BBP33	Fig. 2	133872	B33-46-724	B-724	Matte Amber	19.1	6.4	1	5000	B30-R4300
BBP33	Fig. 1	133789	B33-1-724	B-724	Matte Amber	19.1	6.4	4	5000	B30-R4300
BBP33	Fig. 1	140723	B33-2-724	B-724	Matte Amber	22.9	6.4	3	5000	B30-R4300
BBP33	Fig. 2	133865	B33-43-724	B-724	Matte Amber	31.8	6.4	1	5000	B30-R4300
BBP33	Fig. 1	140724	B33-4-724	B-724	Matte Amber	38.1	6.4	2	5000	B30-R4300



Static Dissipative Polyimide Labels (B-717, B-718, B-719)

- Circuit board and electronic component ID with static dissipative adhesive and release liner with surface resistivity values recommended for dissipative ESD packaging
- Complies with EIA-541 Packaging Material Standards for ESD Sensitive Items
- For top or bottom-side component or board identification

All: Service temp: -70°C to 100°C (short burst max temp: 80 sec at 300°C, 5 min at 260°C, 2 hrs at 170°C)
Agency approvals:

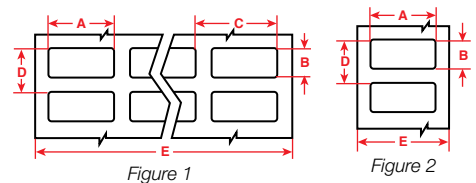

Fits Printer Model(s)	Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Label Height B (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Standard thickness (B-717 gloss white):										
BBP33	Fig. 2	* 133873	B33-46-717	B-717	Gloss White	19.1	6.4	1	5000	B30-R6000
BBP33	Fig. 2	* 133770	B33-103-717	B-717	Gloss White	25.4	6.4	1	5000	B30-R6000
BBP33	Fig. 2	* 134343	B33-43-717	B-717	Gloss White	31.8	6.4	1	5000	B30-R6000
BBP33	Fig. 2	* 133869	B33-45-717	B-717	Gloss White	38.1	6.4	1	5000	B30-R6000
Low profile label (B-718 gloss white):										
BBP33	Fig. 4	* 133779	B33-11-718	B-718	Gloss White	6.4	6.4	12	1500	B30-R6000
BBP33	Fig. 1	* 133861	B33-38-718	B-718	Gloss White	9.5	9.5	9	5000	B30-R6000
BBP33	Fig. 1	* 133805	B33-149-718	B-718	Gloss White	12.7	12.7	4	5000	B30-R6000
BBP33	Fig. 1	* 133798	B33-1-718	B-718	Gloss White	19.1	6.4	4	5000	B30-R6000
BBP33	Fig. 2	* 133874	B33-46-718	B-718	Gloss White	19.1	6.4	1	5000	B30-R6000
BBP33	Fig. 2	* 133878	B33-49-718	B-718	Gloss White	22.9	6.4	1	5000	B30-R6000
BBP33	Fig. 2	* 148803	B33-43-718	B-718	Gloss White	31.8	6.4	1	5000	B30-R6000
BBP33	Fig. 2	* 133870	B33-45-718	B-718	Gloss White	38.1	6.4	1	5000	B30-R6000
BBP33	Fig. 2	* 133963	B33-72-718	B-718	Gloss White	44.5	6.4	1	5000	B30-R6000
Low profile label - Matte white to prevent sticking of solder balls (B-719 matte white):										
BBP33	Fig. 1	* 133862	B33-38-719	B-719	Matte White	9.5	9.5	9	5000	B30-R6000
BBP33	Fig. 2	* 133875	B33-46-719	B-719	Matte White	19.1	6.4	1	5000	B30-R6000
BBP33	Fig. 1	* 133836	B33-2-719	B-719	Matte White	22.9	6.4	3	5000	B30-R6000
BBP33	Fig. 2	* 134344	B33-43-719	B-719	Matte White	31.8	6.4	1	5000	B30-R6000

* **Warning:** Cancer www.P65Warnings.ca.gov

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



Product ID Materials

- A variety of polyester and specialty materials in wide 101mm format rolls designed for shape cutting multiple labels out of a single continuous roll
- Ideal for smaller volume custom Product ID and general ID labels
- Proven materials with agency approvals for Product ID And asset tracking applications




Figure 3



- B-424:** Paper
- B-423:** Polyester w/ standard adhesive
- B-428:** Metallised polyester w/standard adhesive for smooth surfaces
- B-432:** Polyester w/ stronger adhesive
- B-434:** Metallised polyester w/stronger adhesive for textured surfaces
- B-437:** Tedlar® for high-temp labelling & cable wraps
- B-480:** Non-metal polyester with rubber-based adhesive for oily/greasy surfaces
- B-483:** Polyester w/ ultra-aggressive adhesive for rough surfaces
- B-484:** Polyester w/ ultra-aggressive adhesive and pliability for angular surfaces
- B-489:** Polyester w/ ultra-aggressive adhesive for rough surfaces
- B-488:** Polyester w/ standard adhesive and chemical resistance
- B-486:** Metallised polyester w/ ultra-aggressive adhesive for rougher surfaces
- B-498:** Vinyl cloth
- B-565:** Metallised polyester w/ standard adhesive
- B-595:** Indoor/outdoor vinyl
- B-724:** Polyimide label for extremely high temperatures
- B-727:** Polyimide label for standard temperatures
- B-787:** Polyvinylfluoride tape

Matte bright white	Service temp: -40°C to 51°C	RoHS
Gloss white	Service temp: -70°C to 120°C	RoHS
Matte silver	Service temp: -40°C to 145°C	RoHS
Clear	Service temp: -40°C to 100°C	RoHS
Gloss silver	Service temp: -40°C to 90°C	RoHS
Matte white	Service temp: -70°C to 135°C	RoHS
Satin light Grey	Service temp: -70°C to 120°C	RoHS
Gloss white	Service temp: -70°C to 120°C	RoHS
Gloss white	Service temp: -40°C to 115°C	RoHS
Matte white	Service temp: -70°C to 120°C	RoHS
Matte white	Service temp: -40°C to 160°C	RoHS
Matte silver	Service temp: -40°C to 120°C	RoHS
Semi-gloss white	Service temp: -40°C to 79°C	RoHS
Matte silver	Service temp: -40°C to 115°C	RoHS
Semi-gloss white	Service temp: -40°C to 82°C	RoHS
Matte amber	Service temp: -70°C to 270°C	RoHS
Gloss white	Service temp: -70°C to 100°C	RoHS
Gloss white	Service temp: -70°C to 100°C	RoHS

Fits Printer Model(s)	Diagram	For BBP37 XY-Cutter	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Roll Length B (m)	Labels Per Roll	Rec. Ribbon
S3100, BBP35, 37	Fig. 3	✗	143578	B30C-4000-423	B-423	White	101.6	45.7 m	1 roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3	✗	145298	B30C-4000-424	B-424	White	101.6	45.7 m	1 roll (cont.)	B30-R4300
S3100, BBP35, 37	Fig. 3	✗	145292	B30C-4000-432	B-432	Clear	101.6	36.6 m	1 roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3	✗	143579	B30C-4000-437	B-437	White	101.6	45.7 m	1 roll (cont.)	B30-R4300
S3100, BBP35, 37	Fig. 3	✗	143580	B30C-4000-483	B-483	White	101.6	39.6 m	1 roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3	✗	145295	B30C-4000-484	B-484	White	101.6	45.7 m	1 roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3	✗	143584	B30C-4000-488	B-488	White	101.6	39.6 m	1 roll (cont.)	B30-R4300
S3100, BBP35, 37	Fig. 3	✗	143581	B30C-4000-489	B-489	White	101.6	39.6 m	1 roll (cont.)	B30-R4300
All	Fig. 3	✗	142027	B30C-4000-595-WT	B-595	White	101.6	30.4 m	1 roll (cont.)	B30-R10000
S3100, BBP35, 37	Fig. 3	✗	145297	B30C-4000-727	B-727	White	101.6	39.6 m	1 roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3	✗	149181	B30C-4000-498	B-498	White	101.6	24.4m	1 roll (cont.)	B30-R6200
S3100, BBP35, 37	Fig. 3	✗	143582	B30C-4000-787	B-787	White	101.6	18.3 m	1 roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3	✗	145296	B30C-4000-724	B-724	Amber	101.6	39.6 m	1 roll (cont.)	B30-R4300
S3100, BBP35, 37	Fig. 3	✗	148780	B30C-4000-480	B-480	Light Grey	101.6	35.1 m	1 roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3	✗	145300	B30C-4000-428	B-428	Silver	101.6	39.6 m	1 roll (cont.)	B30-R4300
S3100, BBP35, 37	Fig. 3	✗	145293	B30C-4000-434	B-434	Silver	101.6	39.6 m	1 roll (cont.)	B30-R6000
S3100, BBP35, 37	Fig. 3	✗	145294	B30C-4000-486	B-486	Silver	101.6	35.1 m	1 roll (cont.)	B30-R4300
All	Fig. 3	✗	117920	B30C-4000-565-SL	B-565	Silver	101.6	30.4 m	1 roll (cont.)	B30-R10000



Tamper-Evident Asset ID Labels (B-438)

- Leaves checkerboard footprint on surface and on label if removed to prevent re-use




Figure 2




Figure 3



Diagram	Part No.	Catalogue No.	B#	Colour	Label Width A (mm)	Label Height B (mm)	Labels Per Roll	Rec. Ribbon
Fig. 2	118076	B30-17-438	B-438	Matte Silver	50.8	25.4	1225	B30-R4300
Fig. 2	118077	B30-18-438	B-438	Matte Silver	76.2	25.4	1225	B30-R4300
Fig. 2	118078	B30-222-438	B-438	Matte Silver	76.2	50.8	650	B30-R4300
Fig. 3	118014	B30C-3000-438-SL	B-438	Matte Silver	76.2	30.5m	1 roll (cont.)	B30-R4300

All labels shown are compatible with the BradyPrinter S3100, BBP31, BBP33, BBP35 and BBP37 printers unless otherwise noted.



Print Ribbons

for S3100, BBP®31, BBP®33, BBP®35 & BBP®37

“Drop & Click” print ribbons for 5-second ribbon supply changes

- Tough, smear-proof ribbons that produce long-lasting printed text and withstand years in industrial areas and outdoor conditions
- Self-contained cartridges drop straight into printer with a “click”
- No calibrating, no threading, no wasted feeding, no hassles and the ink will always be facing the right direction!
- Printer notifies user if installed ribbon is not recommended for installed labels



Ribbon installs in 5 seconds...snaps into place!

Print Ribbon / Label Material Compatibility

B-# Material		B30-R4300 (Black)	B30-R6000 (Black)	B30-R6200 (Black)	B30-R6400 (Black)	B30-R6600 (Black)	B30-R10000 (Black)	B30-R4500-SV* (Silver)	B30-R4400-WT (White)	B30-R6700-WT* (White)	B30-R10000-WT (White)	B30-R10000-YL (Yellow)	B30-R10000-YL2 (Yellow)	B30-R10000 (Colours)
B-342	Permasleeves	●	-	-	-	-	-	●*	-	-	-	-	-	-
B-344	Permasleeves	-	-	-	-	●	-	-	-	●*	-	-	-	-
B-345	Permasleeves	-	●	-	-	-	-	-	●	-	-	-	-	-
B-423	Glossy White Polyester	-	●	●	-	-	-	-	-	-	-	-	-	-
B-424	Matte White Paper	●	-	-	-	-	-	-	-	-	-	-	-	-
B-425	Polypropylene	●	-	-	●	-	-	-	-	-	-	-	-	-
B-428	Metallised Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-432	Glossy Clear Polyester	-	●	-	-	-	-	-	●	-	-	-	-	-
B-434	Glossy Metallised Polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-437	Tedlar®	●	-	-	-	-	-	-	-	-	-	-	-	-
B-438	Tamper Evident Metallised Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-480	Polyester Rubber-Based Adhesive	-	●	-	-	-	-	-	●	-	-	-	-	-
B-483	Glossy White Polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-483	ToughStripe®	-	●	-	-	-	-	-	●	-	-	-	-	-
B-484	Glossy White Polyester	-	●	-	-	-	-	-	-	-	-	-	-	-
B-486	Matte Metallised Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-488	Matte White Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-489	Matte White Polyester	●	-	-	-	-	-	-	-	-	-	-	-	-
B-509	Printable Magnetic	-	-	-	-	-	●	-	-	-	-	-	-	●**
B-526	Photoluminescent Polyester	-	-	-	-	-	●	-	-	-	-	-	-	●**
B-549	Cold Temperature Polyester	-	-	-	-	-	●	-	-	●	-	-	-	●**
B-551	Non-Adhesive Tag	-	-	-	-	-	●	-	-	-	-	-	-	●**
B-565	Metallised Polyester	-	-	-	-	-	●	-	-	-	-	-	-	-
B-569	Low-Halide Polyester	-	-	-	-	-	●	-	-	-	●	-	-	●**
B-581	Repositionable Vinyl	-	-	-	-	-	●	-	-	-	●	-	-	●**
B-584	Retro Reflective	-	-	-	-	-	●	-	-	-	-	-	-	●**
B-593	Raised Panel	-	●	-	-	-	-	-	●	-	-	-	-	-
B-595	Outdoor Vinyl	-	-	-	-	-	●	-	-	-	●	●***	●***	●**
B-854	Toughwash™ Metal Detectable	-	●	-	-	-	-	-	-	-	-	-	-	-
B-855	Toughwash™	-	●	-	-	-	-	-	-	-	-	-	-	-
B-724	Matte Amber Polyimide	●	-	-	-	-	-	-	-	-	-	-	-	-
B-727	Glossy White Polyimide	-	●	-	-	-	-	-	-	-	-	-	-	-
B-787	Glossy White Polyvinyl Fluoride	-	●	-	-	-	-	-	-	-	-	-	-	-
B-7569	Vinyl Film	-	-	-	-	-	●	-	-	-	-	-	-	-
B-7642	Permasleeves	●	-	-	●	-	-	-	-	-	-	-	-	-

Refer to the corresponding Tech Data Sheets for complete material information at BradyID.com.au/techdata.

* B30-R4500-SV ribbon for use with B-342 black PermaSleeves® only; B30-R6700-WT ribbon for use with B-345 black PermaSleeves® only.

**Coloured ribbons optimized for use on white material. Test use on other material colours for suitability to your application.

***Use B30-R10000-YL for printing yellow onto white. Use B30-R10000-YL2 for printing yellow onto other colours of B-595.

Single Colour Print Ribbons

- Solid colour ribbons for printing a single colour onto a label
- Can be swapped out for printing multi-colour labels on BBP35 or BBP37 printer if a panelled multi-colour ribbon is not on hand

Part No.	Catalogue No.	Colour	Size (mm)	Length (m)
118084	B30-R10000	Black	109.9	60.9 m
118093	B30-R6000	Black	109.9	60.9 m
143119	B30-R6200	Black	109.9	60.9 m
143118	B30-R6400	Black	109.9	60.9 m
118095	B30-R6600	Black	109.9	60.9 m
118094	B30-R4300	Black	109.9	60.9 m
118090	B30-R10000-WT	White	109.9	60.9 m
118097	B30-R4400-WT	White	109.9	60.9 m
133357	B30-R6700-WT	White*	109.9	60.9 m
118923	B30-R4500-SV	Silver*	109.9	60.9 m
118089	B30-R10000-RD	Red	109.9	60.9 m
118086	B30-R10000-GN	Green	109.9	60.9 m
118085	B30-R10000-BL	Blue	109.9	60.9 m
118091	B30-R10000-YL	Yellow**	109.9	60.9 m
143501	B30-R10000-YL2	Yellow**	109.9	60.9 m
118088	B30-R10000-OR	Orange	109.9	60.9 m
118087	B30-R10000-MA	Magenta	109.9	60.9 m
140856	B30-R10000-PRCCY	Process Cyan***	109.9	60.9 m
140854	B30-R10000-PRCYEL	Process Yellow***	109.9	60.9 m
140853	B30-R10000-PRCMAG	Process Magenta***	109.9	60.9 m




* B30-R4500-SV ribbon for use with B-342 black PermaSleeves® only; B30-R6700-WT ribbon for use with B-345 black PermaSleeves® only.

** B30-R10000-YL for printing yellow onto white. B30-R10000-YL2 for printing yellow onto other colours of B-595.

*** Process ribbons print a much lighter shade — designed to be used together with other process ribbons and black ribbon to lay down a dot pattern for printing "blended" colours and process colour objects with the BBP35 or BBP37 printers.

BBP®35 & BBP®37 Multi-Colour "Panelled" Print Ribbons

- Ribbons have panels of 2 or 4 different colours for printing multiple colours onto a label
- Use CMYK ribbon for printing blended colours. Blended colours are not as saturated as solid or spot colour panelled ribbons, but do offer a broader palette of available colours and shades
- Print multiple colours without having to swap in multiple ribbons

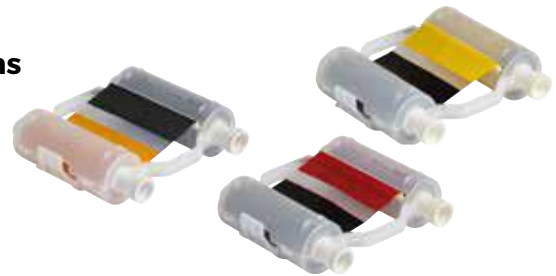

Two Colour Print Ribbons

Fits Printer Model(s)	Part No.	Catalogue No.	Colour	Size (mm)	Length (m)
203mm panel length - Typical yield: 100 panel sets per roll					
BBP35, 37	140850	B30-R10000-KR-8	Black and Red	101.9 x 203.2 Panels	60.9 m
BBP35, 37	140849	B30-R10000-KY-8	Black and Yellow	101.9 x 203.2 Panels	60.9 m
BBP35, 37	140848	B30-R10000-KB-8	Black and Blue	101.9 x 203.2 Panels	60.9 m
BBP35, 37	140847	B30-R10000-KO-8	Black and Orange	101.9 x 203.2 Panels	60.9 m
BBP35, 37	140846	B30-R10000-KG-8	Black and Green	101.9 x 203.2 Panels	60.9 m
BBP35, 37	140857	B30-R10000-GR-8	Green and Red	101.9 x 203.2 Panels	60.9 m
406mm panel length - Typical yield: 60 panel sets per roll					
BBP35, 37	140864	B30-R10000-KR-16	Black and Red	101.9 x 406.4 Panels	60.9 m
BBP35, 37	140855	B30-R10000-KY-16	Black and Yellow	101.9 x 406.4 Panels	60.9 m
BBP35, 37	140852	B30-R10000-KB-16	Black and Blue	101.9 x 406.4 Panels	60.9 m
BBP35, 37	140863	B30-R10000-KO-16	Black and Orange	101.9 x 406.4 Panels	60.9 m
BBP35, 37	140845	B30-R10000-KG-16	Black and Green	101.9 x 406.4 Panels	60.9 m
BBP35, 37	140851	B30-R10000-RB-16	Red and Blue	101.9 x 406.4 Panels	60.9 m

Four Colour Print Ribbons

Fits Printer Model(s)	Part No.	Catalogue No.	Colour	Size (mm)	Length (m)
203mm panel length - Typical yield: 50 panel sets per roll					
BBP35, 37	140862	B30-R10000-KRGB-8	Black, Red, Green and Blue	101.9 x 203.2 Panels	60.9 m
BBP35, 37	140860	B30-R10000-KRYG-8	Black, Red, Yellow and Green	101.9 x 203.2 Panels	60.9 m
BBP35, 37	140866	B30-R10000-KRYB-8	Black, Red, Yellow and Blue	101.9 x 203.2 Panels	60.9 m
BBP35, 37	140865	B30-R10000-KRBO-8	Black, Red, Blue and Orange	101.9 x 203.2 Panels	60.9 m
BBP35, 37	140867	B30-R10000-CMYK-8	Process Cyan, Mgrnta, Yell, Blk	101.9 x 203.2 Panels	60.9 m
406mm panel length - Typical yield: 30 panel sets per roll					
BBP35, 37	140858	B30-R10000-KRGB-16	Black, Red, Green and Blue	101.9 x 406.4 Panels	60.9 m
BBP35, 37	140859	B30-R10000-KRYB-16	Black, Red, Yellow and Blue	101.9 x 406.4 Panels	60.9 m
BBP35, 37	140861	B30-R10000-CMYK-16	Black, Cyan, Magenta, Yellow **	101.9 x 406.4 Panels	60.9 m

** Process ribbons print a much lighter shade — designed to be used together with other process ribbons and black ribbon to lay down a dot pattern for printing "blended" colours and process colour objects.



Australia
Customer Service: 1800 620 816
BradyID.com.au

